


ANSI C18.1M, Part 2-2011

---

American National  
Standard for Portable  
Primary Cells and  
Batteries with Aqueous  
Electrolyte - Safety  
Standard



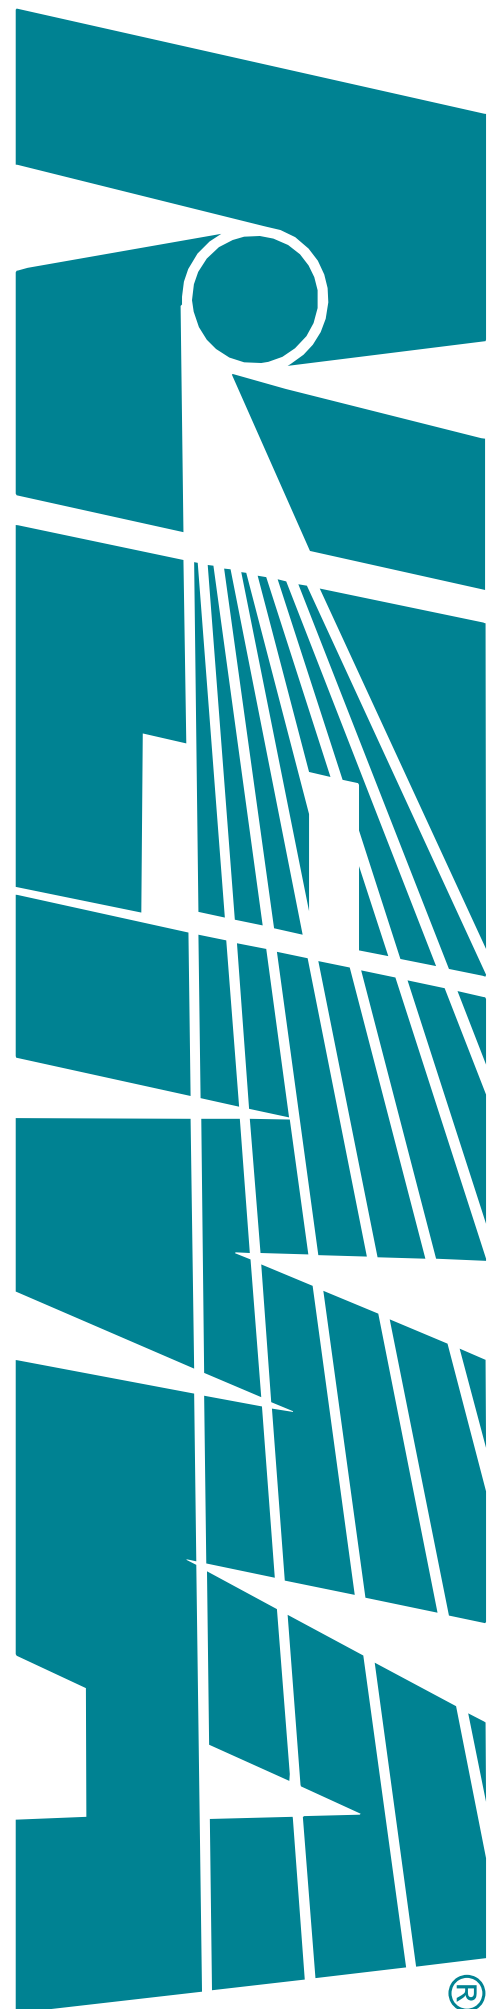

# **ANSI C18.1M, Part 2-2011**

## **American National Standard**

for Portable Primary Cells and Batteries  
with Aqueous Electrolyte—

Safety Standard





**ANSI C18.1M, Part 2-2011**  
Revision of ANSI C18.1M, Part 2-2003

American National Standard  
**for Portable Primary Cells and Batteries  
with Aqueous Electrolyte—  
Safety Standard**

Secretariat:

**National Electrical Manufacturers Association**

Approved December 22, 2010

**American National Standards Institute**

### **NOTICE AND DISCLAIMER**

The information in this publication was considered technically sound by the consensus of persons engaged in the development and approval of the document at the time it was developed. Consensus does not necessarily mean that there is unanimous agreement among every person participating in the development of this document.

ANSI standards and guideline publications, of which the document contained herein is one, are developed through a voluntary consensus standards development process. This process brings together volunteers and/or seeks out the views of persons who have an interest in the topic covered by this publication. While NEMA administers the process to promote fairness in the development of consensus, it does not write the document and it does not independently test, evaluate, or verify the accuracy or completeness of any information or the soundness of any judgments contained in its standards and guideline publications.

NEMA disclaims liability for any personal injury, property, or other damages of any nature whatsoever, whether special, indirect, consequential, or compensatory, directly or indirectly resulting from the publication, use of, application, or reliance on this document. NEMA disclaims and makes no guaranty or warranty, expressed or implied, as to the accuracy or completeness of any information published herein, and disclaims and makes no warranty that the information in this document will fulfill any of your particular purposes or needs. NEMA does not undertake to guarantee the performance of any individual manufacturer or seller's products or services by virtue of this standard or guide.

In publishing and making this document available, NEMA is not undertaking to render professional or other services for or on behalf of any person or entity, nor is NEMA undertaking to perform any duty owed by any person or entity to someone else. Anyone using this document should rely on his or her own independent judgment or, as appropriate, seek the advice of a competent professional in determining the exercise of reasonable care in any given circumstances. Information and other standards on the topic covered by this publication may be available from other sources, which the user may wish to consult for additional views or information not covered by this publication.

NEMA has no power, nor does it undertake to police or enforce compliance with the contents of this document. NEMA does not certify, test, or inspect products, designs, or installations for safety or health purposes. Any certification or other statement of compliance with any health or safety-related information in this document shall not be attributable to NEMA and is solely the responsibility of the certifier or maker of the statement.

# AMERICAN NATIONAL STANDARD

Approval of an American National Standard requires verification by ANSI that the requirements for due process, consensus, and other criteria for approval have been met by the standards developer.

Consensus is established when, in the judgment of the ANSI Board of Standards Review, substantial agreement has been reached by directly and materially affected interests. Substantial agreement means much more than a simple majority, but not necessarily unanimity. Consensus requires that all views and objections be considered, and that a concerted effort be made toward their resolution.

The use of American National Standards is completely voluntary; their existence does not in any respect preclude anyone, whether he has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standards.

The American National Standards Institute does not develop standards and will in no circumstances give an interpretation of any American National Standard. Moreover, no person shall have the right or authority to issue an interpretation of an American National Standard in the name of the American National Standards Institute. Requests for interpretations should be addressed to the secretariat or sponsor whose name appears on the title page of this standard.

**CAUTION NOTICE:** This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute.

Published by

**National Electrical Manufacturers Association  
1300 North 17th Street, Rosslyn, VA 22209**

© Copyright 2011 by the National Electrical Manufacturers Association

All rights reserved including translation into other languages, reserved under the Universal Copyright Convention, the Berne Convention for the Protection of Literary and Artistic Works, and the International and Pan American Copyright Conventions.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Printed in the United States of America

**This page intentionally left blank.**

## Contents

Foreword.....	v
<b>1 Introduction .....</b>	<b>1</b>
<b>2 Scope .....</b>	<b>1</b>
<b>3 Normative References .....</b>	<b>1</b>
<b>4 Definitions .....</b>	<b>1</b>
<b>5 Requirements for Safety .....</b>	<b>3</b>
5.1 Design.....	3
5.1.1 General.....	3
5.1.2 Battery Case.....	3
5.1.3 Venting.....	3
5.1.4 Attitude (Orientation) .....	3
5.1.5 Multi-Cell Molded Plastic Battery Enclosure .....	4
5.2 Intended Use Requirements.....	4
5.3 Reasonably Foreseeable Misuse Requirements .....	4
5.4 Design Consideration Requirements .....	4
5.5 Quality Assurance Plan.....	4
<b>6 Sampling for Type Approval .....</b>	<b>5</b>
<b>7 Testing and Compliance (Verification) .....</b>	<b>5</b>
7.1 General .....	5
7.1.1 Test Temperature.....	5
7.2 Pretest Dimensions, Voltage, and Insulation Resistance Test Requirements.....	6
7.2.1 Dimensions.....	6
7.2.2 Open Circuit Voltage .....	6
7.2.3 Closed Circuit Voltage .....	6
7.2.4 Insulation Resistance Test .....	6
7.3 Intended Use Simulation Tests.....	7
7.3.1 Test A: Partial Use.....	7
7.3.2 Test B: Vibration .....	7
7.3.3 Test C: Thermal Shock.....	8
7.3.4 Test D: Mechanical Shock.....	9
7.4 Reasonably Foreseeable Misuse Tests.....	10
7.4.1 Test E: Incorrect Installation .....	10
7.4.2 Test F: External Short-Circuit .....	11
7.4.3 Test G: Free Fall (User Drop).....	12
7.4.4 Test H: Over-Discharge.....	12
7.4.5 Test I: Crush.....	13
7.5 Design Consideration Tests.....	14
7.5.1 Test J: Thermal Abuse .....	14
7.5.2 Test K: Mold Stress .....	15
<b>8 Information for Safety.....</b>	<b>18</b>

**9 Instructions for Use..... 18**

**10 Marking..... 19**

10.1 General ..... 19

10.2 Small Size Batteries ..... 19

**Annex A Guidance for Device Designers..... 21**

**Annex B Guidance for Packaging, Handling, and Transportation ..... 28**

**Annex C Bibliography ..... 30**

**Tables**

Table 1 Sampling for Type Approval ..... 5

Table 2 Vibration Test Sequence ..... 8

Table 3 Shock Pulse..... 9

Table 4A Tests Required for Single Cell Batteries ..... 16

Table 4B Tests Required for Multi-Cell Batteries ..... 17

Table 5 Suggested Minimum Diameters for Coil Spring Wire ..... 27

**Figures**

Figure 1 Small Cell or Battery Gauge (Inner Dimensions) ..... 3

Figure 2 Circuit Diagram for Test E: Incorrect Installation..... 10

Figure 3 Circuit Diagram for Test F: External Short-Circuit..... 11

Figure 4 Circuit Diagram for Test H: Over-Discharge ..... 13

Figure 5 Example of Series Connection with One Battery Reversed ..... 21

Figure 6 Positive Contact, Contact Recessed Between Ribs..... 23

Figure 7 Positive Contact, Recessed Aperture..... 23

Figure 8 Negative Contact, Contact is “U” Shaped ..... 24

Figure 9A ..... 25

Figure 9B ..... 25

Figure 10A Example of a Short Circuit—A Switch is Piercing the Battery Insulating Jacket..... 25

Figure 10B Example of Insulation to Prevent Short Circuit—Insulating Material Positioned as Shown Prevents the Switch from Damaging the Battery Jacket ..... 26

Figure 11 Examples Showing Distorted Springs ..... 26

Figure 12 One Example of Protected Insertion Design ..... 27

**Foreword** (This foreword is not part of American National Standard C18.1M, Part 2-2011.)

In 1912, a committee of the American Electrochemical Society recommended standard methods to be used in testing dry cells. Their recommendations were followed five years later when the National Bureau of Standards (currently the National Institute of Standards and Testing) prepared specifications that included cell sizes, arrangement of cells within batteries, service tests, and required performance.

The need for continued revision to the specification led to the authorization, by the American Engineering Standards committee, of a permanent sectional committee on dry cells. This committee, C18, representing battery users, manufacturers, and government agencies, has remained active since that time. Committee C18 prepared ANSI Standard C18.1M, Part 2, upon which this document is originally based under the sponsorship of the National Electrical Manufacturers Association (NEMA).

ANSI Standard C18.1M, Part 2 was created in parallel with the International Electrotechnical Commission (IEC) project to develop a product safety standard for primary batteries with aqueous electrolyte (IEC Publication 60086-5). This revision was undertaken to update the safety tests and content in ANSI Standard C18.1M, Part 2 and to keep them current with the best possible practices.

Suggestions for the improvement of this standard are welcome. They should be sent to the National Electrical Manufacturers Association, 1300 N. 17th Street, Suite 1752, Rosslyn, VA 22209, Attention: Secretary ANSI ASC C18.

This standard was processed and approved for submittal to ANSI by the Accredited Standards Committee C18 on Portable Cells and Batteries. Committee approval of the standard does not necessarily imply that all committee members voted for its approval. At the time it approved this standard, the C18 committee had the following members:

**Michael H. Babiak, Chairperson**

Steven Wicelinski, Vice-chairperson  
Ben Biroshak, Secretary

<i>Organization Represented:</i>	<i>Name of Representative:</i>
BAE Systems	Andrew J. Markow
Bureau Veritas, Consumer Product Services	Thomas Heckman
Duracell	Steven Wicelinski S. Keel Kelly (Alternate)
Eastman Kodak Company	James C. DeJager
Energizer Battery Manufacturing, Inc.	Michael H. Babiak Marcus K. Boolish (Alternate)
Fisher Price / Mattel	Douglas G. Golde
Intertek ETL SEMKO	Robert Armstrong
Kids II	Robert J. Coughlin
Panasonic Battery Corporation of America	Charles P. Monahan

Portable Power Consultants

Ramesh V. Shah

SGS

Jody M. Leber

Spectrum Brands, Inc.

John L. Hadley  
Denis Carpenter (Alternate)

Tiburon Associates

James A. Gucinski

Underwriters Laboratories

Laurie B. Florence

The members of Subcommittee C18-5 on Safety Standards who contributed to the development of this standard are:

**Keel Kelly, Chairperson**

Ramesh Shah, Vice-chairperson

Ben Biroshak, Secretary

Michael Babiak  
Marcus Boolish  
Robert Coughlin  
James DeJager  
Laurie Florence  
Douglas Golde

James Gucinski  
John Hadley  
Jody Leber  
Andrew Markow  
Charles Monahan  
Steven Wicelinski

## For Portable Primary Cells and Batteries with Aqueous Electrolyte— Safety Standard

### 1 Introduction

The concept of safety is closely related to safeguarding the integrity of people and property. This standard defines performance requirements for primary batteries with aqueous electrolyte to ensure their safe operation under normal use and reasonably foreseeable misuse.

Safety is a balance between freedom from risk of harm and other demands to be met by the product. There can be no absolute safety. Even at the highest level of safety, the product can only be relatively safe. In this respect, decision-making is based on risk evaluation and safety judgment.

As safety will pose different problems, it is impossible to provide a set of precise provisions and recommendations that will apply in every case. This may be particularly true for button type batteries. However, this standard, when followed on a judicious “use when applicable” basis, will provide reasonably consistent standards for safety.

### 2 Scope

This American National Standard specifies tests and requirements for portable primary batteries with aqueous electrolyte and zinc anode (non-lithium) to ensure their safe operation under normal use and reasonably foreseeable misuse. For reference, the chemical systems standardized in ANSI C18.1M, Part 1 are:

Carbon zinc (Leclanché and zinc chloride types);  
Alkaline manganese dioxide;  
Silver oxide;  
Zinc air;  
Nickel oxy-hydroxide.

### 3 Normative References

The following standards contain provisions which, through reference in this text, constitute provisions of this American National Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this American National Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below.

ANSI C18.1M, Part 1, *American National Standard for Portable Primary Cells and Batteries with Aqueous Electrolyte—General and Specifications*

### 4 Definitions

For the purposes of this American National Standard, the following definitions apply.

**4.1 battery:** One or more cells, including case, terminals, and marking.