



**IPC-9641**

**2013 - June**

**High Temperature Printed Board  
Flatness Guideline**

*A standard developed by IPC*

*Association Connecting Electronics Industries*



---

**The Principles of Standardization**

In May 1995 the IPC's Technical Activities Executive Committee (TAEC) adopted Principles of Standardization as a guiding principle of IPC's standardization efforts.

**Standards Should:**

- Show relationship to Design for Manufacturability (DFM) and Design for the Environment (DFE)
- Minimize time to market
- Contain simple (simplified) language
- Just include spec information
- Focus on end product performance
- Include a feedback system on use and problems for future improvement

**Standards Should Not:**

- Inhibit innovation
- Increase time-to-market
- Keep people out
- Increase cycle time
- Tell you how to make something
- Contain anything that cannot be defended with data

**Notice**

IPC Standards and Publications are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for his particular need. Existence of such Standards and Publications shall not in any respect preclude any member or nonmember of IPC from manufacturing or selling products not conforming to such Standards and Publication, nor shall the existence of such Standards and Publications preclude their voluntary use by those other than IPC members, whether the standard is to be used either domestically or internationally.

Recommended Standards and Publications are adopted by IPC without regard to whether their adoption may involve patents on articles, materials, or processes. By such action, IPC does not assume any liability to any patent owner, nor do they assume any obligation whatever to parties adopting the Recommended Standard or Publication. Users are also wholly responsible for protecting themselves against all claims of liabilities for patent infringement.

**IPC Position Statement on Specification Revision Change**

It is the position of IPC's Technical Activities Executive Committee that the use and implementation of IPC publications is voluntary and is part of a relationship entered into by customer and supplier. When an IPC publication is updated and a new revision is published, it is the opinion of the TAEC that the use of the new revision as part of an existing relationship is not automatic unless required by the contract. The TAEC recommends the use of the latest revision. Adopted October 6, 1998

**Why is there a charge for this document?**

Your purchase of this document contributes to the ongoing development of new and updated industry standards and publications. Standards allow manufacturers, customers, and suppliers to understand one another better. Standards allow manufacturers greater efficiencies when they can set up their processes to meet industry standards, allowing them to offer their customers lower costs.

IPC spends hundreds of thousands of dollars annually to support IPC's volunteers in the standards and publications development process. There are many rounds of drafts sent out for review and the committees spend hundreds of hours in review and development. IPC's staff attends and participates in committee activities, typesets and circulates document drafts, and follows all necessary procedures to qualify for ANSI approval.

IPC's membership dues have been kept low to allow as many companies as possible to participate. Therefore, the standards and publications revenue is necessary to complement dues revenue. The price schedule offers a 50% discount to IPC members. If your company buys IPC standards and publications, why not take advantage of this and the many other benefits of IPC membership as well? For more information on membership in IPC, please visit [www.ipc.org](http://www.ipc.org) or call 847/597-2872.

Thank you for your continued support.



IPC-9641

# High Temperature Printed Board Flatness Guideline

Developed by the Printed Board Coplanarity Subcommittee (6-11) of the  
Product Reliability Committee (6-10) of IPC

Users of this publication are encouraged to participate in the  
development of future revisions.

Contact:

IPC  
3000 Lakeside Drive, Suite 309S  
Bannockburn, Illinois  
60015-1249  
Tel 847 615.7100  
Fax 847 615.7105

This Page Intentionally Left Blank

## Acknowledgment

Any document involving a complex technology draws material from a vast number of sources. While the principal members of the Printed Board Coplanarity Subcommittee (6-11) of the Product Reliability Committee (6-10) are shown below, it is not possible to include all of those who assisted in the evolution of this standard. To each of them, the members of IPC extend their gratitude.

---

### Product Reliability Committee

Chair  
Reza Ghaffarian, Ph.D.  
Jet Propulsion Laboratory

Vice Chair  
James J. Monarchio  
TTM Technologies, Inc.

### Printed Board Coplanarity Subcommittee

Chair  
John J. Davignon  
Davignon Consultancy, LLC

### Technical Liaisons of the IPC Board of Directors

Bob Neves  
Microtek Laboratories

---

### Printed Board Coplanarity Subcommittee

Mudasir Ahmad, Cisco Systems Inc.  
Christine Blair, STMicroelectronics Inc.  
Paul Brown, Alcatel-Lucent Canada, Inc.  
Beverly Christian, BlackBerry  
C. Don Dupriest, Lockheed Martin Missiles & Fire Control  
Steven R. Ethridge, Dell Inc.  
Lei Feng, Huawei Technologies Co., Ltd.

Hardeep S. Heer, FTG Circuits  
Kayleen Helms, Intel Corporation  
Richard Iodice, Raytheon Company  
Phil Isaacs, IBM Corporation  
Rahul Joshi, Hewlett-Packard Company  
Clifford R. Maddox, Boeing Company  
Chris Mahanna, Robisan Laboratory Inc.  
David Mendez, Flextronics

Timothy Purdie, Akrometrix LLC  
Jose A. Rios, Endicott Interconnect Technologies Inc  
Thilo A. Sack, Celestica  
David Senk, Cisco Systems Inc.  
Joseph Thomas, ZN Technologies  
Bill R. Vuono, Raytheon Company  
Kurt Whitcomb, Amphenol Printed Circuits, Inc.  
Gil White, Viasystems North America, Inc.

This Page Intentionally Left Blank

# Table of Contents

<b>1 PURPOSE</b> .....	1	5.3 Thermocouple Placement .....	10
1.1 Introduction .....	1	5.4 Specific Temperatures for Data Acquisition and Ramp Rate .....	10
1.2 Scope .....	1	5.5 Additional Recommendations for Minimum Methodology Capabilities .....	12
1.3 Terms and Definitions .....	1	5.6 Data Reporting .....	13
1.3.1 Clamped (Support Condition) .....	1	<b>6 METROLOGY ACCURACY FOR PRINTED BOARD FLATNESS</b> .....	13
1.3.2 Concave .....	1	<b>7 REFERENCES</b> .....	14
1.3.3 Confocal Method .....	1	<b>APPENDIX A Example Flatness Data Report on one Local Area (FCBGA1 land) of one Printed Board through a Simulated Reflow Temperature Profile for Pallet vs. no Pallet Evaluation</b> .....	15
1.3.4 Convex .....	1		
1.3.5 Dynamic Warpage .....	1		
1.3.6 Full-Field Methods .....	1		
1.3.7 Geometric Moiré .....	2		
1.3.8 Pallet .....	2		
1.3.9 Peak Reflow Temperature .....	2		
1.3.10 Point-Based Methods .....	2		
1.3.11 Projection Moiré/Fringe Projection Method .....	2		
1.3.12 Simply Supported on a Pallet (Support Condition) .....	2		
1.3.13 Simply Supported on Rails (Support Condition) .....	2		
1.3.14 Shadow Moiré Method .....	2		
1.3.15 Support Conditions .....	2		
<b>2 APPLICABLE DOCUMENTS</b> .....	2		
2.1 IPC .....	2		
2.2 JEDEC .....	2		
2.3 Joint Industry Standards .....	3		
<b>3 MEASUREMENT INSTRUMENT REQUIREMENTS</b> ..	3		
3.1 Geometric Moiré (Shadow Moiré and Projection Moiré/Fringe Projection) .....	3		
3.2 Confocal and Optical Coordinate Measurement .....	4		
3.2.1 Confocal Systems .....	4		
3.2.2 Optical Coordinate Measuring Machines (OCMM) .....	5		
3.3 Digital Image Correlation .....	5		
<b>4 PARAMETERS OF INTEREST</b> .....	6		
4.1 Types .....	6		
4.2 Printed Board Support Conditions During Reflow .....	7		
<b>5 RECOMMENDED TEST METHODOLOGY</b> .....	10		
5.1 Preconditioning/Preparation of Samples .....	10		
5.2 Number of Samples .....	10		
		<b>Figures</b>	
		Figure 1-1 Printed Board Shape Convention with Example BGA Package .....	1
		Figure 3-1 Initial vs. Deformed Package-Printed Board Configuration .....	3
		Figure 3-2 Geometric Moiré Configuration .....	4
		Figure 3-3 Demonstration of Fringe Order on a Curved Lens Imaged using Shadow Moiré .....	4
		Figure 3-4 Illustration of the Confocal Imaging Principle [6] .....	5
		Figure 3-5 Example of a Laser Confocal Displacement Meter Approach Using a Glass Datum Plane ..	6
		Figure 3-6 Schematic of the OCMM Principle .....	6
		Figure 4-1 Example of Top View Depiction of Clamped Pallet with Standoffs where Dark Areas Indicate Pallet Material and “Open” Spaces are Indicated by White Areas .....	7
		Figure 4-2 Example of Top View Depiction of a Simply- Supported Pallet with Standoffs where Dark Areas Indicate Pallet Material and “Open” Spaces are Indicated by White Areas .....	7
		Figure 4-3 Simplified Mechanical Model for Clamped and Simply-Supported Conditions .....	8
		Figure 4-4 Example of Side-View Depiction of the Difference in Flatness for Clamped vs. Simply-Supported Conditions without Standoffs .....	8
		Figure 4-5 Simplified Mechanical Model for Simply-Supported Conditions with a) one Standoff and b) without a Standoff .....	9
		Figure 4-6 Example of Side-View Depiction of the Difference in Flatness for Simply-Supported Conditions with and without a Standoff .....	9

---

Figure 5-1	Example of Simulated Lead-Free Reflow Temperature Profile for Measuring Flatness ..	11
Figure 5-2	IPC-7095 Relevant Characteristics of a) eutectic and b) lead-free solder reflow profiles .....	11
Figure 5-3	Board Schematic in (x, y, z) Directions .....	13
Figure 6-1	Lens Geometry .....	14
Figure A2-1	Peak-to-Valley Flatness vs. Temperature of FCBGA1 Land Area .....	15
Figure A3-1	Flatness Shape Contours, No Pallet .....	16
Figure A3-2	Flatness Shape Contours, with Pallet .....	16

### Tables

Table 3-1	Summary of Methods for Measuring Printed Board Flatness .....	3
-----------	---	---

# High Temperature Printed Board Flatness Guideline

## 1 PURPOSE

**1.1 Introduction** During the surface mount assembly process of an electronic package to a printed board through a reflow temperature profile, the flatness behavior of both the package and printed board are critical for the integrity of solder joint formation and reliability. While the deviation of the package from planarity during this process is critical, controlling the printed board flatness is equally important for preventing subsequent assembly-related issues, including open or bridging joints, which ultimately cause product failure. Board flatness is largely driven by a change in intrinsic properties through exposure to changes in temperature, with the final flatness state becoming a function of the entire temperature history or reflow profile and support boundary conditions. It is also driven by copper symmetry stack-up and metal pattern balancing. The worst-case deviation of the printed board from flatness may be at room temperature, peak temperature during reflow, or at any temperature in between. Therefore, printed board flatness must be characterized during the entire reflow thermal cycle, and not solely at room temperature at the beginning and end of the process. This document aims to provide guidance on methods and procedures for critically evaluating printed board flatness during a simulated temperature reflow cycle.

**1.2 Scope** The purpose of this test method is to measure the shape and relative change in shape of a local area of interest (e.g., flip-chip ball grid array (FCBGA) land area) of printed boards through a range of temperatures typical during surface mount and through-hole builds of integrated circuit packages to printed boards. The use of shape measurements and relative changes in shape will depend on the specific application and interest of the user performing the measurement. This guideline differs from and does not supersede IPC-TM-650, Method 2.4.22, which is used for inspection of bow and/or twist of bare printed boards at room temperature.

**1.3 Terms and Definitions** The definition of all terms used herein **shall** be in accordance with IPC-T-50 and as defined in 1.3.1 through 1.3.15.

**1.3.1 Clamped (Support Condition)** Surface-mount technology (SMT) build condition where the printed board is fixed in a carrier, or pallet, which may or may not have standoff supports underneath the middle area of the printed board in addition to spring clamps that slide over the top edges of the primary surface of the printed board. The printed board is not free to rotate at the edges, and the clamps help mitigate the board warpage in either direction during a reflow cycle (see Figure 4-3 item a).


**1.3.2 Concave** Shape description for flatness where the center of the printed board lies lower than the corners of the printed board with respect to the local surface area of interest (e.g., FCBGA land on primary or secondary side) as shown in Figure 1-1. This aligns with JEDEC JESD22-B112.

**1.3.3 Confocal Method** Approach of forming an image by scanning one or more focused beams of light across a surface and using spatial filtering techniques to eliminate out-of-focus light or glare, keeping only the points that exactly coincide with the surface being measured.

**1.3.4 Convex** Shape description for flatness where the corners of the printed board lie lower than the center of the printed board with respect to the local surface area of interest (e.g., FCBGA land on primary or secondary side) as shown in Figure 1-1. This aligns with JEDEC JESD22-B112.

**1.3.5 Dynamic Warpage** The full-field difference in flatness of a component (package, printed board, etc.) between initial ambient and reflow temperature, obtained by subtracting full-field initial ambient flatness from reflow-temperature flatness.

**1.3.6 Full-Field Methods** A general class of non-contact optical metrologies which measure topography and shape change over an entire (x,y) region or field of view during a single acquisition, rather than at a single point per acquisition.

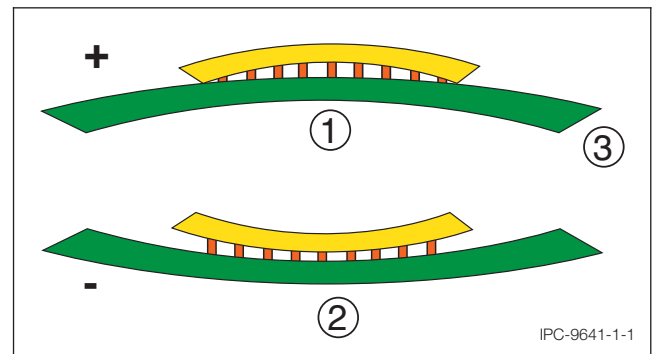

**Figure 1-1 Printed Board Shape Convention with Example BGA Package**

(Note: BGA package shape could be convex, flat, or concave regardless of printed board shape)

1. Convex
2. Concave
3. Printed Board Shape