


Hydraulic Institute Guideline for

Rotodynamic Pump Efficiency Prediction

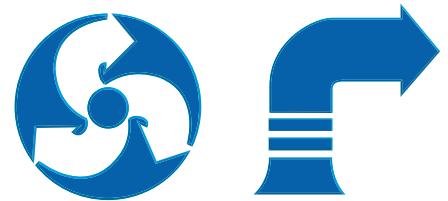

Hydraulic Institute Guideline for Rotodynamic Pump Efficiency Prediction

Sponsor
Hydraulic Institute
www.Pumps.org

Approved by Hydraulic Institute
July 29, 2015

Hydraulic Institute Guideline

Approval of a Hydraulic Institute Guideline requires verification by the Hydraulic Institute that the requirements for due process and the criteria for approval have been met by the committee responsible for authoring the guideline.

Approval is established when, in the judgement of the Hydraulic Institute Standards Committee, substantial agreement has been reached by the authoring committee, HI Standards Voting Representatives, and by peer reviewers, where applicable. Substantial agreement signifies that much more than a simple majority was achieved, but does not necessarily indicate unanimity. Approval requires that all views and objections be considered, and that a concerted effort be made toward their resolution.

The use of Hydraulic Institute Guidelines is completely voluntary; their existence does not in any respect preclude anyone, whether he has approved the guidelines or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the guidelines.

CAUTION NOTICE: This Hydraulic Institute Guideline may be revised or withdrawn at any time. The procedures of the Hydraulic Institute require that action be taken periodically to reaffirm, revise, or withdraw this guideline. Purchasers of Hydraulic Institute Guidelines may obtain current information on all guidelines by calling or writing the Hydraulic Institute or by visiting the HI e-Store at <http://estore.Pumps.org>.

Published By

**Hydraulic Institute
6 Campus Drive, First Floor North
Parsippany, NJ 07054-4406**

www.Pumps.org

Copyright © 2015 Hydraulic Institute
All rights reserved.

No part of this publication may be reproduced in any form,
in an electronic retrieval system or otherwise, without prior
written permission of the publisher.

Printed in the United States of America

ISBN 978-1-935762-44-7



Recycled
paper

Contents

Page

Foreword v

20.3 Rotodynamic pump efficiency prediction. 1

Appendix A Index..... 16

Figures

20.3a — Optimum normally attainable efficiency chart (metric units) 6

20.3b — Efficiency reduction due to specific speed (metric units)..... 7

20.3c — Optimum normally attainable efficiency chart (US customary units) 8

20.3d — Efficiency reduction due to specific speed (US customary units) 9

20.3e — Deviation from normally attainable efficiency (metric units) 10

20.3f — Deviation from normally attainable efficiency (US customary units)..... 11

20.3g — Estimated efficiency increase due to improved surface finish (metric units)..... 12

20.3h — Estimated efficiency increase due to improved surface finish (US customary units) 13

20.3i — Estimated efficiency decrease due to increased wear ring clearance (metric units) 14

20.3j — Estimated efficiency decrease due to increased wear ring clearance (US customary units) 15

Tables

20.3 — Pump types and factors that influence efficiency 5