


S/S by
3300-1986

AS 3300—1983
UDC 621.365:64.06—83

Australian Standard 3300—1983

Amend 1.
AMDT 2-1985

APPROVAL AND TEST SPECIFICATION FOR GENERAL REQUIREMENTS FOR HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES

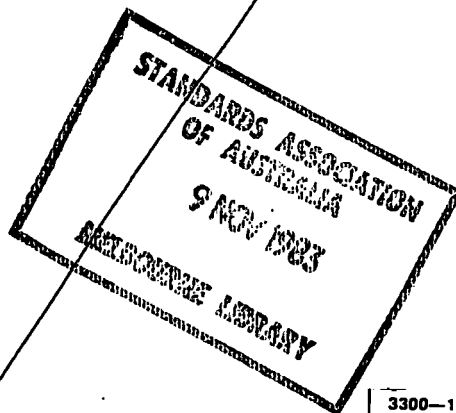

3300—1986 Approval and test specification—General requirements for household and similar electrical appliances

(In Update Service 28) A4 71pp H

Specifies general safety requirements for household and similar appliances. It is a base specification which, when combined with a particular specification in the AS 33—series, becomes a complete specification for an individual product. It is not normally used without a particular specification. Closely follows IEC 335-1 (2nd Edition) including amendments No 1 to No 4.

Committee EL/2. Supersedes AS 3300—1983. Publication date 1986-06-02. ISBN 0 7262 4205 5.



STANDARDS ASSOCIATION OF AUSTRALIA
Incorporated by Royal Charter

THE FOLLOWING SCIENTIFIC, INDUSTRIAL AND GOVERNMENTAL ORGANIZATIONS and departments were officially represented on the committee entrusted with the preparation of this standard:

Australian Chamber of Commerce
Australian Electrical and Electronics Manufacturers Association
Confederation of Australian Industry
Consumer Electronics Supplier's Association
Electrical Apparatus Approvals Authorities
Electrical Contractors Associations of Australia
Electrical Testing Laboratories
Electricity Supply Association of Australia

This standard, prepared by Committee EL/2, Electrical Approvals Standards, was approved on behalf of the Council of the Standards Association of Australia on 21 July and published on 4 November 1983.

Review of Australian Standards. To keep abreast of progress in industry, Australian standards are subject to periodic review and are kept up-to-date by the issue of amendments or new editions as necessary. It is important therefore that standards users ensure that they are in possession of the latest edition, and any amendments thereto. Full details of all SAA publications will be found in the Annual List of Australian Standards; this information is supplemented each month by SAA's journal 'The Australian Standard', which subscribing members receive, and which gives details of new publications, new editions and amendments, and of withdrawn standards. Suggestions for improvements to Australian standards, addressed to the head office of the Association, are welcomed. Notification of any inaccuracy or ambiguity found in an Australian standard should be made without delay in order that the matter may be investigated and appropriate action taken.

STANDARDS ASSOCIATION OF AUSTRALIA

Incorporated by Royal Charter

AMENDMENT No 2

to

AS 3300—1983

Approval and Test Specification for

GENERAL REQUIREMENTS FOR HOUSEHOLD AND SIMILAR ELECTRICAL APPLIANCES

REVISED TEXT

The 1983 edition of AS 3300 which was amended in October 1984 is further amended as follows; the amendments should be inserted in the appropriate place.

SUMMARY: The following sections of the standard are covered by this amendment: Clauses 2.2.10, 2.5.6, 30.101.

Published on 4 April 1985.

AMDT No 2 APRIL 1985 Page 6. Clause 2.2.10.

Delete item (c) and substitute the following:

- (c) Type Y attachment which denotes a method of attachment such that access to terminations can only be gained with the aid of special purpose tools normally available only to the manufacturer or his agents.

This amendment forms part of the specification on publication.

AMDT No 2 APRIL 1985 Page 39. Clause 25.6.

Eighth paragraph—first line—

Add 'Type M', between the words 'Where' and 'Type Y'.

This amendment forms part of the specification on publication.

AMDT No 2 APRIL 1985 Page 51. Clause 30.101.

Delete Clause 30.101 and substitute the following:

30.101 SOLID INSULATING MATERIALS AND NON-METALLIC ENCLOSURES.

30.101.1 General requirements. Parts of non-metallic material other than—

- (a) printed circuit boards
(b) decorative trims, wiring insulation, knobs and other small parts unlikely to be ignited or to propagate flames originating from inside the appliance,

shall be subjected to the glow-wire test specified in AS 2420 and the results determined in accordance with the provisions of that standard.

For equipment not covered by individual approval and test specifications, the test temperature and duration of test shall be determined by the Approvals Authority in consultation with the submitter, account being taken of the guidelines set down in AS 2420.

NOTES:

1. In general, the glow-wire tip temperature for connections for hand-held appliances is 550°C, for other attended appliances is 750°C, and unattended appliances is 850°C.
2. The needle flame test may be applied to the enclosure of the equipment as the first test if agreement is reached between the Approvals Authority and the applicant. However the following should be noted:
 - (a) The needle flame test shall be applied, where possible, from the inside of the enclosure on parts likely to be ignited by the tests when conducted in accordance with the provisions of items (a) and (b) of Clause 30.101.2.
 - (b) The equipment should be examined to assess whether any flames occurring within the appliance would not be likely to ignite the external enclosure or any burning droplets

would escape through openings such as vent holes or ignite other materials in a manner that may lead to a failure of the device.

3. A component, which has complied when tested to the appropriate individual approval and test specification need not be retested unless the location of the component within an appliance, or more stringent requirements of the appliance specification so require.
4. A flow chart for guidance on the application of the glow-wire test and needle flame test is under consideration.

30.101.2 Glow-wire tip temperature and duration of test. The temperature of the glow-wire tip and duration of the test shall be:

- (a) As specified in the individual approval and test specification, for insulating material that retains in position connections carrying a current greater than 0.5 A., and which may create a fire hazard in the event of a failure.

NOTES:

1. The individual approval and test specification should indicate conditions under which the above current is measured if other than during the normal temperature rise test. It may also indicate a variation in the amplitude of current if required by that specification.
 2. An example of connections that, in the event of a failure, may create a fire hazard is screw connections that may be made or remade during *installation* or *user* servicing of the appliance.
 3. Examples of connections that are not normally considered to be a fire hazard are quick connects, crimped or soldered connections.
 4. If insulating material retaining connections in position is not tested under item (a) it should be tested under item (b).
- (b) As specified in the individual approval and test specification for—
- (i) insulating material retaining live parts in position other than those tested in (a) above;
 - (ii) barriers which prevent any flames produced during the tests conducted in accordance with the provisions of items (a) and (b)(i) from contacting other non-metallic material; and
 - (iii) non-metallic parts (including external enclosures) that are unprotected by a barrier and are contacted by any flame produced when the tests are conducted in accordance with the provisions of items (a), (b)(i) or (b)(ii).
- (c) 550°C for 30 s for—
- (i) non-metallic parts (including external enclosures) which are—
 - (A) effectively separated from ignition sources by a barrier which passes the test

- conducted in accordance with the provisions specified in item (b) above; or
- (B) not contacted by any flame produced when the tests are conducted in accordance with the provisions of items (a) or (b) above and not exposed to burning droplets or glowing particles;
- (ii) non-metallic enclosures which only enclose approved insulated wiring.
- (iii) all other non-metallic material.

NOTE: The majority of thermoplastic materials are capable of complying with the 550 °C glow-wire test. Consequently, when the material is adequately specified this test may be waived at the discretion of the Approvals Authority.

30.101.3 Compliance. In addition to the requirements of Section 2 of AS 2420, the complete product has failed to comply with the tests of Clause 30.101.1, if—

- (i) burning droplets or glowing particles escape from the equipment and ignite the tissue paper or scorch the particle board underlay beneath the specimen;
- (ii) the external enclosure ignites and fails to extinguish within the prescribed time when the tests are conducted in accordance with the provisions of items (a) or (b) of Clause 30.101.2 above; or
- (iii) Any failure occurs when the tests are conducted in accordance with the provisions of item (c) of Clause 30.101.2 above.

Other failures recorded when the tests are conducted in accordance with the provisions of items (a) or (b) of Clause 30.101.2 above shall require the equipment to be subjected to the needle flame test specified in AS 2420 and results determined in accordance with the provisions of that standard. The needle flame test is applied for 30 seconds to all parts of non-metallic material (including barriers and enclosures) that are likely to be ignited by and are positioned within a distance of 50 mm of those parts which originally failed the glow-wire test. In addition the needle flame test is also applied to those parts outside the 50 mm specified above which were contacted by the flame or subjected to burning droplets or glowing particles as a result of a failure when the tests were conducted in accordance with the provisions of items (a) or (b) of Clause 30.101.2 above.

If a specimen passes the needle flame test it is deemed to comply with the requirements of this clause.

Nevertheless if a failure occurs during—

- (i) the needle flame test; or
- (ii) the glow-wire test when conducted in accordance with the provisions of item (c) of Clause 30.101.2 above,

the test may be repeated on two further specimens, both of which shall pass the test for compliance with this clause.

This amendment forms part of the specification on publication.

Page 60. Clause B30.101.

Add the following as Notes 3 and 4.

3. If the size of the PCB is such that it is not possible to apply the flame as required in (i) above, the test should be conducted on the complete PCB.
4. If evidence is provided that a PCB, together with any coating has been given a rating of V₀ when tested to UL 94 or equivalent requirements, this test may be waived at the discretion of the Approvals Authority.

This amendment forms part of the specification on publication.

AMDT
No 2
APRIL
1985

STANDARDS ASSOCIATION OF AUSTRALIA
Incorporated by Royal Charter

AMENDMENT No 1

to

AS 3300—1983

**Approval and Test Specification for
GENERAL REQUIREMENTS FOR HOUSHOLD AND SIMILAR
ELECTRICAL APPLIANCES**

REVISED TEXT

The 1983 edition of AS 3300 is amended as follows; the amendments should be inserted in the appropriate place.

SUMMARY: The following section of the standard is covered by this amendment: Clauses 24.101.

Published on 5 October 1984.

Page 38. Clause 24.101.

Add the following new clause:

24.101 ELECTRONIC REGULATING DEVICES AND SWITCHES.
Electronic thermostats and electronic switches without a mechanical switch in the main circuit may not provide a reliable off-state. Therefore the circuit on the load side shall be considered to be live.

This amendment forms part of the specification on publication.

AMDT
No 1
OCT.
1984

AUSTRALIAN STANDARD

**APPROVAL AND TEST SPECIFICATION
FOR**

**GENERAL REQUIREMENTS
FOR HOUSEHOLD AND SIMILAR
ELECTRICAL APPLIANCES**

AS 3300—1983

First published	1978
Second edition	1980
Third edition	1983

**PUBLISHED BY THE STANDARDS ASSOCIATION OF AUSTRALIA
STANDARDS HOUSE, 80 ARTHUR STREET, NORTH SYDNEY, N.S.W.**

ISBN 0 7262 3164 9

PREFACE

This standard was prepared by the Association's Committee on Electrical Approvals Standards and supersedes AS 3300—1980. It is the basic or parent specification of a new series of Australian specifications that will ultimately replace those existing approval and test specifications dealing with household and similar electrical appliances; the new specifications will be issued progressively and will need to be read in conjunction with this standard. (See Introduction to SAA approval and test specifications herein.) The new series is based on a similar series of specifications issued by the International Electrotechnical Commission (IEC).

It is intended that a number of other basic specifications will be prepared to cover items of electrical equipment other than appliances, such as accessories, wiring equipment, control devices, protective devices, electronic equipment, isolating transformers, etc. These basic specifications, together with the particular specifications related to them, will eventually supersede the existing AS 3100, Approval and Test Specification for Definitions and General Requirements for Electrical Materials and Equipment, and the series of particular specifications in the AS 3101 to AS 3199 groups which currently are related to AS 3100. It is expected that AS 3100 will be in use for a considerable period of time whilst it is referred to by any existing particular specification or is otherwise required.

The existing basic specification AS 3100 includes general requirements applicable to all appliances and the related particular specifications contain additional requirements for each appliance or group of appliances. In the new series, the basic specification AS 3300 contains a wide range of requirements, all of which may not necessarily be applicable to a particular appliance. A particular specification in the new series converts AS 3300 into the specification for the type of appliance being considered; it does this by indicating, clause by clause, whether or not the requirements and test methods are applicable in whole or in part or whether they should be replaced, modified or supplemented.

Whereas AS 3100 may be satisfactorily used as a specification for an appliance for which there is no particular specification related to AS 3100, it is not practicable to use AS 3300 in a similar manner. It may however be used as a guide by taking into account particular specifications related to AS 3300 for similar equipment.

Where a particular specification related to AS 3300 is published for an appliance covered by an existing particular specification related to AS 3100, the existing specification will not be withdrawn for a period of approximately two years following publication of the new specification. Until such time as a new series specification is issued, the existing particular specification related to AS 3100 will apply; however, during the 2-year period before withdrawal of an existing particular specification when two specifications are concurrent for the same appliance, it is anticipated that regulatory authorities will approve appliances to either specification.

While this standard closely follows the IEC 335-1 (2nd Edition including Amendment No 3), Safety of Household and Similar Electrical Appliances—General Requirements, some of the requirements of that publication have been modified to take account of local conditions. Where this standard deviates technically from the IEC document by way of additional or different requirements, the deviation is indicated by a rule in the margin against the clause, or part thereof, affected. A list of deviations is included in an annex to this standard.

The changes in this edition comprise the incorporation of Amendments No 1 to No 5 to the 1980 edition and the amendments resulting from Amendment No 3 to IEC 335-1.

In this standard the requirements proper appear in 'normal' type and the test requirements appear in 'italic' type. Explanatory matters are contained in notes to the clauses, in a smaller size of the 'normal' type.

This standard requires reference to the existing SAA approval and test specifications (see list following 'Introduction to SAA approval and test specifications') and to the following Australian and British standards:

- | | |
|---------|---|
| AS 1279 | Copper Refinery Shapes |
| AS 1566 | Copper and Copper Alloy Plate, Rolled Bar, Sheet, Strip and Foil for General Engineering Purposes |
| AS 1931 | High Voltage Testing Techniques |
| AS 1939 | Classification of Degrees of Protection Provided by Enclosures for Electrical Equipment |
| BS 5267 | A.C. Motor Capacitors |

©Copyright — STANDARDS ASSOCIATION OF AUSTRALIA 1983

Users of standards are reminded that copyright subsists in all SAA publications. No part of this publication may be reproduced, stored in a retrieval system in any form or transmitted by any means without prior permission in writing of the Standards Association of Australia.

CONTENTS

	<i>Page</i>		<i>Page</i>
1. SCOPE		8.3 Appliances with Flexible Shafts	15
1.1 Scope and Application	6	8.4 Conducting Liquids	15
1.2 Interference Suppression	6	8.5 Shafts of Knobs, Handles, Levers and the Like	15
2. DEFINITIONS		8.6 Handles, Knobs and Levers Held or Actuated in Normal Use	15
2.1 General	6	8.7 Handles Continuously Held in Normal Use	15
2.2 Specific Definitions	6	8.8 Capacitors	15
3. GENERAL REQUIREMENTS		8.9 Appliances Connected to Supply by a Plug	15
3.1 Design and Construction	9	9. STARTING OF MOTOR-OPERATED APPLIANCES	
3.2 Compliance with Alternative Require- ments	9	9.1 General	15
3.101 D.C. Component from A.C. Appliances	9	9.2 (Void)	
4. GENERAL NOTES ON TESTS		9.3 Overload Protection Devices	16
4.1 Type of Tests	9	10. INPUT AND CURRENT	
4.2 Sampling	9	10.1 Rated Input	16
4.3 Order of Tests	10	10.2 Motor-operated Appliances	16
4.4 Position During Tests	10	10.3 Heating Appliances or Detachable Heating	16
4.5 Temperature	10	11. HEATING	
4.6 Voltage	10	11.1 Normal Use	16
4.7 Appliances with Alternative Heating Elements or Accessories	10	11.2 Location or Position During Tests	16
4.8 Appliances with Heating Elements and Motors	10	11.3 Determination of Temperature Rises	17
4.9 Appliances with Variable Setting De- vices	10	11.4 Operation of Heating Appliances Dur- ing Tests	17
4.10 Appliances for Building-in	10	11.5 Operation of Motor-operated Appli- ances During Tests	17
4.11 Appliances Supplied by Flexible Cable or Cord	10	11.6 Operation of Combined Appliances During Tests	17
4.12 Variation of Rating with Temperature	10	11.7 Operation Time	17
4.13 Normal Load	10	11.8 Limits of Temperature Rise	17
4.14 Class III Appliances	11	11.9 Appliances with Automatic Cord Reels	17
4.15 Earthing of Accessible Metal Parts	11	11.10 Accelerated Ageing Tests on Insulating Systems of Motor Windings	17
4.16 Unearthed Accessible Metal in Class I Appliances	11	12. OPERATION UNDER OVERLOAD CONDITIONS OF APPLIANCES WITH HEATING ELEMENTS	
4.17 Appliances Operating at Safety Extra- low Voltage	11	12.1 Normal Use	18
4.18 Special Applications	11	12.2 Test	18
5. RATING		12.3 Additional Test	18
5.1 Maximum Rated Voltage	11	13. ELECTRICAL INSULATION AND LEAKAGE CURRENT AT OPERATING TEMPERATURE	
6. CLASSIFICATION		13.1 Normal Use	22
6.1 General	11	13.2 Leakage Current Test	22
7. MARKING		13.3 Electrical Strength Test	23
7.1 General	11	14. RADIO AND TELEVISION INTERFERENCE SUPPRESSION	
7.2 Appliances for Short-time or Intermit- tent Operation	12	14.1 General	23
7.3 Detachable Heating Elements	12	15. MOISTURE RESISTANCE	
7.4 Appliance with Adjustable Voltage or Input Ratings	12	15.1 Enclosures	23
7.5 Appliances or Detachable Heating Elements with Multiple Voltage Rat- ings or Ranges	12	15.2 Tests of Enclosures	24
7.6 Symbols	12	15.3 Effect of Spillage	24
7.7 Terminals	12	15.4 Effect of Humidity	24
7.8 Connection Diagram	13	16. INSULATION RESISTANCE AND ELECTRIC STRENGTH	
7.9 Control Switches	13	16.1 General	25
7.10 Positions of Regulating Devices and Switches	13	16.2 Leakage Current Test	25
7.11 Adjustable Devices	13	16.3 Insulation Resistance Test	26
7.12 Instructions for Installation and Use	13	16.4 Electric Strength Test	26
7.13 Instruction Sheets	13	17. OVERLOAD PROTECTION	
7.14 Legibility and Durability	13	17.1 Appliances Incorporating Circuits Supplied from Transformers	27
8. PROTECTION AGAINST ELECTRIC SHOCK			
8.1 Construction and Enclosure	14		
8.2 Appliances Used in Contact with Skin or Hair	15		

	Page		Page
18. ENDURANCE		22.31	Appliances Connected to Gas or Water Pipes and Appliances Intended to be Permanently Connected 35
18.1 General	27	22.32	Appliances Having Compartments Liable to be Cleaned in Normal Use 35
18.2 Operating Time	27	22.33	Protection of Internal Parts Against Oil, Grease, etc 35
18.3 Starting	27	22.34	Brushes, Brush-holders and Brush-caps 35
18.4 Appliances Provided with Automatic Starting	27	22.35	Radio and Television Interference Suppressors 36
18.5 Appliances with Thermal Cutouts	28		
18.6 Test Results	28	23. INTERNAL WIRING	
19. ABNORMAL OPERATION		23.1 Mechanical Protection	36
19.1 General	28	23.2 Protection and Enclosure	36
19.2 Reduced Voltage Test	28	23.3 Use of Beads and Similar Ceramic Insulators	36
19.3 Increased Voltage Test 1	28	23.4 Wiring Which Can Move	36
19.4 Increased Voltage Test 2	28	23.5 Maintenance of Creepage Distances and Clearance	36
19.5 Increased Voltage Test 3	29	23.6 Identification of Wiring	36
19.6 Stalled-motor Test	29	23.7 Use of D-type Fuse Bases	37
19.7 Appliances with Three-phase Motors	29	23.8 Use of Aluminium Conductors	37
19.8 Running Overload Test	29		
19.9 Appliances for Short-time or Intermittent Operation	30	24. COMPONENTS	
19.10 Appliances with Series Motors	30	24.1 General	37
19.11 Test Results	30	24.2 Prohibited Components	37
20. STABILITY AND MECHANICAL HAZARDS		24.3 Switches	37
20.1 Stability	30	24.4 Sockets	37
20.2 Mechanical Hazards	31	24.5 Connecting Devices Used for Intermediate Connections	37
21. MECHANICAL STRENGTH		24.6 Lampholders	38
21.1 General	31	24.7 Series Resistors of Glow Discharge Lamps	38
21.2 Screwed Glands and Conduit Entries	32	24.8 Thermal Cutouts	38
21.3 Test for Screwed Glands	32	24.9 Switch Required for Mobile Motor-operated Appliances	38
21.4 Test for Conduit Entry Shoulders	32	24.10 Mercury Switches	38
22. CONSTRUCTION		24.11 Class I Appliances with Heating Elements	38
22.1 Protection Against Electric Shock	32	25. SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CABLES AND CORDS	
22.2 Protection Against Moisture	32	25.1 Means of Connection	38
22.3 Operation in Normal Positions	32	25.2 Provision of Connection Facility	38
22.4 Protection Against Penetration from Beneath	32	25.3 Appliance Inlet-sockets	38
22.5 Appliances with Adjustable Voltage Setting	32	25.4 Power Supply Cord Assembly	39
22.6 Appliances with Adjustable Thermostats	32	25.5 Fitting of Plugs	39
22.7 Location of Buttons of Non-self-resetting Controls	32	25.6 Power Supply Cord—General Requirements	39
22.8 Appliances with Integral Pins	32	25.7 Moulding-on of Cord	40
22.9 Appliances where Integral Pins are Prohibited	32	25.8 Insulation at Cord Entry	40
22.10 Removal of Parts Needed for Moisture Protection	32	25.9 Inlet Bushings	40
22.11 Protection Against Water	33	25.10 Cord Guards	40
22.12 Fixing of Handles, Knobs, etc	33	25.11 Cord Anchorages	41
22.13 Fixing of Components Which May Require Replacement	33	25.12 Connection Facilities	42
22.14 Storage Hooks and Cord Reels for Flexible Cords	33	25.13 Interconnection Cables and Cords — General	42
22.15 Materials Which Burn Fiercely	33	25.14 Interconnection Cables and Cords — Access to Live Parts	43
22.16 Use of Fibrous or Hygroscopic Material as Insulation	33	26. TERMINALS FOR EXTERNAL CONDUCTORS	
22.17 Use of Driving Belts for Insulation	33	26.1 Types of Fixings	43
22.18 Segregation of Extra-low Voltage Parts and Other Live Parts	33	26.2 Terminals for Fixed Wiring and Type X Attachment	43
22.19 Use of Reinforced Insulation	34	26.3 Terminals for Types M, Y or Z Attachments	43
22.20 Removal and Replacement of Insulation	34	26.4 Independent Clamping Means Required	43
22.21 Use of Flexible Cord Sheath as Supplementary Insulation Inside an Appliance	34	26.5 Clamping of Conductors	44
22.22 Creepage and Clearance Distances of Class II Appliances	34	26.6 Preparation of Conductors for Termination	44
22.23 Supplementary and Reinforced Insulation	34	26.7 Pillar or Tunnel Terminals	44
22.24 Direct Contact Between Live Parts and Thermal Insulation	34	26.8 Screw Terminals	44
22.25 Construction of Handles	34	26.9 Stud Terminals	45
22.26 Bare Heating Elements	35	26.10 Additional Test	45
22.27 Sagging of Heating Conductors	35	26.11 Grouping of Terminals	45
22.28 Safeguard Against Excessive Pressure	35	26.12 Access to Terminal Devices	46
22.29 Fixing of Spacers	35	26.13 Terminal Devices of Appliances with Type X Attachments	46
22.30 Corrosion	35		

	<i>Page</i>
27. PROVISION FOR EARTHING	
27.1 Where Required	46
27.2 Earthing Terminals—General Requirements	46
27.3 Earthing Connections—General	46
27.4 Earthing Connections—Resistance to Corrosion	46
27.5 Resistance of Earthing Connections	46
28. SCREWS AND CONNECTIONS	
28.1 Mechanical Strength	47
28.2 Engagement of Thread	47
28.3 Contact Pressure of Electrical Connections	47
28.4 Space-threaded and Thread-cutting Screws	48
28.5 Use of Screws and Rivets	48
29. CREEPAGE DISTANCES, CLEARANCES AND DISTANCES THROUGH INSULATION	
29.1 Creepage Distances and Clearances	48
29.2 Minimum Insulation Thicknesses	50
29.3 Terminal Clearances for Appliances Above 25 A	50
30. RESISTANCE TO HEAT, FIRE AND TRACKING	
30.1 Resistance of External Parts of Insulating Material to Heat	50
30.2 Resistance of Insulating Parts to Abnormal Heat and to Fire	50
30.3 Resistance to Tracking	50
31. RESISTANCE TO RUSTING	
31.1 General	51
32. RADIATION, TOXICITY AND SIMILAR HAZARDS	
32.1 General	51
APPENDICES	
A (Void)	
B Electronic Circuits	59
C (Void)	
D Alternative Requirements for Protected Motor Units	62
E Measurement of Creepage Distance and Clearances	63
F Motors Not Isolated From the Supply Mains and Having Basic Insulation Not Designed for the Rated Voltage of the Appliance	67
G Circuit for Measuring Leakage Currents	69
INTRODUCTION TO SAA APPROVAL AND TEST SPECIFICATION	
1 Historical Development	70
2 Types of Specifications	70
3 Application	70
4 Materials, etc to Comply with Specifications	70
5 Acceptance	70
6 List of Part 2, SAA Approval and Test Specifications	71

TABLES

	<i>Page</i>
1 Maximum Permissible Deviation from Rated Input	16
2 Maximum Temperature Rise	19
3 Temperature Rise for Conducting Materials	21
4 Minimum Insulation Resistance for Motor-operated Appliances	26
5 Test Voltages for Electric Strength Tests	26
6 Operating Times	27
7 Maximum Winding Temperatures	29
8 Maximum Temperature Rises During Abnormal Operation Tests	30
9 Force Applied to Conduit Entry Screwed Glands	32
10 Minimum Nominal Cross-section Area of Power Supply Cords	39
11 Test Values for Cord Pull Test	42
12 Dimensions of Pillar or Tunnel Type Terminals	44
13 Dimensions of Screw Type Terminals	45
14 Dimensions of Stud Terminals	45
15 Test Values for Terminal Pull Test	45
16 Test Values for Screw Torque Test	47
17 Creepage Distances and Clearances	49

FIGURES

1 Standard Test Finger	52
2 Test Pin	52
3 Test Probe	52
4 Diagram for Leakage Current Measurement at Operating Temperature for Single-phase Connection of Class II Appliances	53
5 Diagram for Leakage Current Measurement at Operating Temperature for Single-phase Connection of Appliances Other Than Those of Class II	53
6 Diagram for Leakage Current Measurement at Operating Temperature for Three-phase Connection of Class II Appliances	54
7 Diagram for Leakage Current Measurement at Operating Temperature for Three-phase Connection of Appliances Other Than Those of Class II	54
8 Diagram for Electric Strength Test at Operating Temperature	55
9 Impact-test Apparatus	55
10 Device for Testing Shoulders in Conduit Entries	56
11 Ball-pressure Apparatus	56
12 Arrangement and Dimensions of the Electrodes for the Tracking Test	57
13 Typical D.C. Component Measuring Circuit	57
14 Operating Member of Apparatus for Flexing Test	58
ANNEX	73
RECORD OF AMENDMENTS	76

STANDARDS ASSOCIATION OF AUSTRALIA

Australian Standard
APPROVAL AND TEST SPECIFICATION FOR
GENERAL REQUIREMENTS FOR HOUSEHOLD AND
SIMILAR ELECTRICAL APPLIANCES

1. SCOPE

1.1 SCOPE AND APPLICATION. This specification applies to electric heating appliances and electric motor-operated or magnetically-driven appliances for household and similar purposes.

NOTES:

1. Appliances not intended for normal household use but which nevertheless may be a source of danger to the public, such as appliances intended to be used by laymen in shops, in light industry and on farms, are within the scope of this specification. Examples of such appliances are appliances for hair-dressers, soldering irons, glue pots, sterilizers, infra-red radiation appliances, feed boilers, water pumps and lawn mowers.
2. Except in so far as this specification deals with electric toys, it does not take into account the special hazards which exist in nurseries and other places where there are young children or aged or infirm persons without supervision; in such cases, additional requirements may be necessary.
3. This specification does not apply to—
 - (a) electronic sound and vision equipment (see AS 3159 & AS 3250);
 - (b) electromedical equipment;
 - (c) wires and cables; and
 - (d) accessories.

1.2 INTERFERENCE SUPPRESSION. This specification is concerned with safety and takes into account the influence on safety of components necessary to achieve a required degree of radio and television interference suppression.

2. DEFINITIONS

2.1 GENERAL. Where the terms 'voltage' and 'current' are used, they imply r.m.s. values, unless otherwise specified. Where the term 'motor' is used, it includes magnetic drive units.

2.2 SPECIFIC DEFINITIONS.

2.2.1 Rated voltage denotes the voltage (for three-phase supply, the voltage between phases) assigned to the appliance by the maker.

2.2.2 Rated voltage range denotes the voltage range assigned to the appliance by the maker, expressed by its lower and upper limits.

2.2.3 Working voltage denotes the maximum voltage to which the part under consideration can be subjected when the appliance is operating at its rated voltage and under normal conditions of use.

NOTES:

1. Normal conditions of use include changes of voltage within the appliance imposed by likely occurrences such as the operation of a circuit-breaker or the failure of a lamp.
2. When deducing the working voltage, the effect of possible transient voltages on the supply mains is ignored.

2.2.4 Rated input denotes the input under conditions of adequate heat discharge or under normal load and at normal operating temperature, assigned to the appliance by the maker.

2.2.5 Rated current denotes the current assigned to the appliance by the maker.

NOTE: If no current is assigned to the appliance, the rated current for the purpose of this specification is determined by calculation from the rated input and the rated voltage and or by measuring the current when the appliance is operating at rated voltage under normal load and at normal operating temperature.

2.2.6 Rated frequency denotes the frequency assigned to the appliance by the maker.

2.2.7 Rated frequency range denotes the frequency range assigned to the appliance by the maker, expressed by its lower and upper limits.

2.2.8 Rated capacity for appliances with a liquid container denotes the quantity of liquid for which the appliance is designed.

2.2.9 Detachable flexible cable or cord denotes a flexible cable or cord, for supply or other purposes, intended to be connected to the appliance by means of a suitable appliance coupler.

2.2.10 Power supply cord denotes a flexible cable or cord, for supply purposes, fixed to, or assembled with, the appliance according to one of the following methods:

(a) **Type X attachment** which denotes a method of attachment such that the flexible cable or cord can easily be replaced, without the aid of special purpose tools, by a flexible cable or cord not requiring any special preparation.

(b) **Type M attachment** which denotes a method of attachment such that the flexible cable or cord can easily be replaced, without the aid of special tools, by a special cable or cord with, for example, a moulded-on cord guard or pre-prepared method of termination.

(c) **Type Y attachment** which denotes a method of attachment such that the flexible cable or cord can only be replaced with the aid of special purpose tools normally available only to the manufacturer or his agents.

NOTE: Type Y attachments may be used either with common flexible cables or cords or with special cables or cords.

(d) **Type Z attachment** which denotes a method of attachment such that the flexible cable or cord cannot be replaced without breaking or destroying a part of the appliance.

NOTE: Mouse-trap terminals are considered suitable for Type Y and Type Z attachments only.

SEE
AMD