


AS/NZS 2693:1993 16pp F
 Vehicle jacks
 Specifies design and performance requirements for jacks, other than trolley jacks, which are intended for use with cars, trucks, trailers and other road vehicles. Covers jacks supplied with new vehicles as well as those supplied as accessories or replacements. Test methods for stability, durability, loss of height under load, ease of operation and load capacity are included and produced as a Joint Australian/New Zealand Standard.
 Committee CS66: Supersedes AS 2693—1987: Draft for Comment DR 9111E. Publication date 1993-09-16: ISBN 0 7322 6301 0.

911E

1993
ED

AS 2693—1987

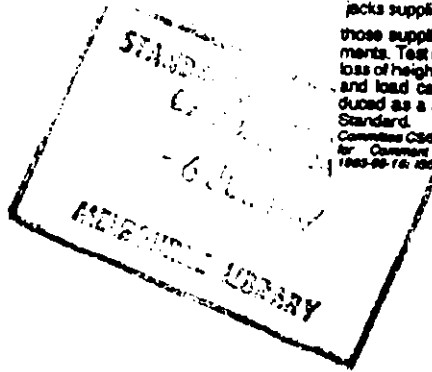

**Standards
 Association of
 Australia**



Australian Standard® 2693—1987

VEHICLE JACKS

This Australian Standard was prepared by Committee CS/55, Car Jacks and Trolley Jacks. It was approved on behalf of the Council of the Standards Association of Australia on 4 May 1987 and published on 1 June 1987.

The following interests are represented on Committee CS/55:

Australian Automotive Aftermarket Association
Australian Automobile Association
Australian Automobile Chamber of Commerce
Australian Federation of Consumer Organizations
Confederation of Australian Industry
Department of the Attorney-General
Department of Consumer Affairs, N.S.W.
Department of Defence
Department of Employment and Training, Vic.
Department of Motor Transport, N.S.W.
Federal Chamber of Automotive Industries
Metal Trades Industry Association of Australia
Ministry of Consumer Affairs, Vic.
Society of Automotive Engineers, Australasia
Trade Practices Commission

Review of Australian Standards. To keep abreast of progress in industry, Australian Standards are subject to periodic review and are kept up-to-date by the issue of amendments or new editions as necessary. It is important therefore that Standards users ensure that they are in possession of the latest edition, and any amendments thereto.

Full details of all SAA publications will be found in the Catalogue of SAA Publications; this information is supplemented each month by SAA's journal 'The Australian Standard', which subscribing members receive, and which gives details of new publications, new editions and amendments, and of withdrawn Standards.

Suggestions for improvements to Australian Standards, addressed to the head office of the Association, are welcomed. Notification of any inaccuracy or ambiguity found in an Australian Standard should be made without delay in order that the matter may be investigated and appropriate action taken.

AUSTRALIAN STANDARD

VEHICLE JACKS

AS 2693—1987

First published	1984
Second edition	1985
Third edition	1987

**PUBLISHED BY THE STANDARDS ASSOCIATION OF AUSTRALIA
STANDARDS HOUSE, 80 ARTHUR ST, NORTH SYDNEY, N.S.W.**

ISBN 0 7262 4650 6

PREFACE

This Standard was originally prepared by the Association's Committee on Car Jacks and Trolley Jacks in response to a request by the Department of Defence which was supported by the Australian Federation of Consumer Organizations.

The Department of Defence had found a number of deficiencies in the design of jacks purchased for use with army vehicles, and felt that the design principles established by this Standard could apply equally to smaller jacks used for passenger cars.

This edition of the Standard includes a revision of Appendix B to allow for the use of test rigs which do not employ a dead weight, as well as a number of minor changes to requirements made at the request of the Department of the Attorney-General.

Suppliers of vehicle jacks should take cognizance of the regulations under the Trade Practices Act relating to the supply of these products.

CONTENTS

	<i>Page</i>
SPECIFICATION	
1 SCOPE	3
2 APPLICATION	3
3 REFERENCED DOCUMENTS	3
4 DEFINITIONS	3
5 DESIGN AND CONSTRUCTION	5
6 PERFORMANCE	5
7 MARKING	6
8 INSTRUCTIONS	6
APPENDICES	
A HEAD CAP ENGAGEMENT AND STABILITY TESTS	7
B EASE OF OPERATION AND PREVENTION OF OVERTRAVEL TESTS	8
C STOP TEST DURING THE LOWERING OF THE JACK	10
D LOSS OF HEIGHT TEST	10
E OVERLOAD TEST	11
F SUMMARY OF REQUIREMENTS FOR VEHICLE JACKS	12

© Copyright — STANDARDS ASSOCIATION OF AUSTRALIA 1987

Users of Standards are reminded that copyright subsists in all SAA publications. No part of this publication may be reproduced, stored in a retrieval system in any form or transmitted by any means without prior permission in writing of the Standards Association of Australia.

STANDARDS ASSOCIATION OF AUSTRALIA

Australian Standard

VEHICLE JACKS

1 SCOPE. This Standard specifies requirements for the design, construction, performance and labelling of jacks designed to raise vehicles. The performance requirements include those relating to ease of use.

A summary of requirements according to vehicle jack type is given in Appendix F.

2 APPLICATION. This Standard is applicable to screw jacks, hydraulic jacks, lever jacks and pantograph jacks. It is not applicable to trolley jacks, which are specified in AS 2615 or to air bag jacks. This Standard may also be applicable to other types of jacks, in which case they shall comply with Clauses 6.7, 7 and 8 together with any other parts of the Standard which the Regulatory Authority deems to be applicable.

3 REFERENCED DOCUMENTS. The following Standards are referred to in this Standard:

- AS 1192 Electroplated Coatings—Nickel and Chromium.
- AS 1789 Electroplated Coatings of Zinc on Iron and Steel.
- AS 1790 Electroplated Coatings of Cadmium on Iron and Steel.
- AS 1830 Iron Castings—Grey Cast Iron.
- AS 1831 Iron Castings—Spheroidal or Nodular Graphite Cast Iron.
- AS 1832 Iron Castings—Malleable Cast Iron.
- AS 2105 Inorganic Zinc Silicate Paint.
- AS 2581 Pressure Sensitive Adhesive Plastics Labels for Permanent Use (General Purpose).
- AS 2615 Trolley Jacks.
- AS K108 Metal Priming Paint, Anti-corrosive.

4 DEFINITIONS. For the purpose of this Standard, the following definitions apply.

4.1 Bearing surface—the area contained within the periphery of the base of a vehicle jack.

NOTES:

1. The bearing surface area of the base should be measured when the head cap is fully raised.
2. When determining the periphery of the base of the jack, any protrusions or embossing of the bearing surface of the base which are less than 5 mm in height should be ignored.

4.2 Designated range of vehicles—the make and model or models of vehicles for which a particular specific vehicle jack is marked as being suitable.

4.3 General purpose jack—a vehicle jack, other than a specific vehicle jack.

4.4 Head cap—the point of contact of the jack with the vehicle.

4.5 Hydraulic jack—a jack in which the lifting force is obtained by means of the operator's force being applied through a liquid (see Figure 1(d)).

4.6 Lever jack—a jack in which the force exerted by the operator is transformed into a lifting force by means of a first or second order lever, used in conjunction with a ratchet (see Figure 1(c)).

4.7 Lifting cycle—the operation of raising the head cap of the jack with the handle provided from its fully lowered position to its fully raised position and then returning it to its fully lowered position.

4.8 Maximum loaded mass—the mass of the unladen vehicle, with a full capacity of lubricating oil, coolant and fuel, together with the heaviest factory-installed options if such options weigh 2 kg or more individually, plus additional loading equivalent to 68 kg for each seating position other than the driving position, plus the greater of the following:

- (a) 13.6 times the number of seating positions, in kilograms, for luggage.
- (b) The manufacturer's nominated load-carrying capacity evenly distributed over the available load area.

4.9 Nominated capacity—the capacity nominated by the manufacturer as the maximum load that is to be lifted by the jack.

NOTE: The nominated capacity needs to be marked on the jack (see Clause 7.1(c)).

4.10 Pantograph jack (scissor jack)—a screw jack in which the screw forms part of a hinged frame. The rotation of the screw alters the geometry of the frame, thus lifting or lowering the load (see Figure 1(b)).

4.11 Projected plan area of the base—the maximum area described by joining the outermost peripheral points on the base of a vehicle jack.

NOTES:

1. The projected plan area of the base should be measured when the head cap is fully raised.
2. When determining the periphery of the base of the jack, any protrusions or embossing of the bearing surface of the base which is less than 5 mm in height should be ignored.

4.12 Screw jack—a jack in which the force exerted by the operator is transformed into a lifting force by means of the rotation of a screw thread (see Figure 1(a)).

4.13 Specific vehicle jack—a jack which is limited in its application to a specific vehicle or range of vehicles and is not intended to be used to lift a vehicle at other than the specific engagement points.

NOTE: The designated range of vehicles needs to be marked on the specific vehicle jack (see Clause 7.1(b)).

4.14 Unladen mass—the mass of a vehicle with a full capacity of lubricating oil, coolant and fuel, but without goods, occupants or options other than those options which are essential to normal use of the vehicle.

4.15 Vehicle—any wheeled vehicle used on a road, not including any vehicle used on a railway or tramway, but including any towed unit such as a caravan or trailer.