

DR 95037

1995 ed

FWD 95037 AS 1573—1985  
UDC 669.3-426


1995 ED.

# Australian Standard<sup>®</sup> 1573—1985

---

## COPPER AND COPPER ALLOYS— WIRE FOR ENGINEERING PURPOSES

[Title allocated by Defence Cataloguing Authority:  
WIRE, NON-ELECTRICAL (Copper and Copper Alloy  
General Engineering Purposes).....NSC 9525]

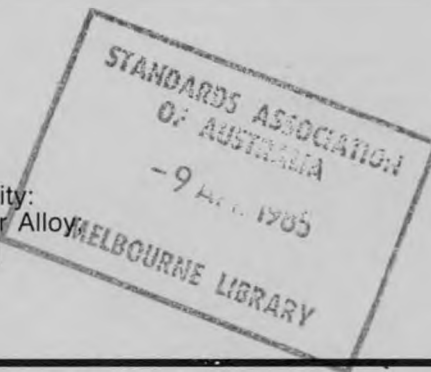

---

**STANDARDS ASSOCIATION OF AUSTRALIA**  
*Incorporated by Royal Charter*

This Australian standard was prepared by Committee MT/2, Copper and Copper Alloys. It was approved on behalf of the Council of the Standards Association of Australia on 30 October 1984 and published on 4 March 1985.

---

The following interests are represented on Committee MT/2:

Australian Foundry Institute  
Australian Welding Institute  
Confederation of Australian Industry  
Copper Development Association of Australia Limited  
Coppermetals Extruders Council of Australia  
Department of Defence  
Metropolitan Water, Sewerage and Drainage Board, N.S.W.  
Telecom Australia  
Universities

---

**Review of Australian Standards.** To keep abreast of progress in industry, Australian standards are subject to periodic review and are kept up-to-date by the issue of amendments or new editions as necessary. It is important therefore that standards users ensure that they are in possession of the latest edition, and any amendments thereto.

Full details of all SAA publications will be found in the Catalogue of SAA Publications; this information is supplemented each month by SAA's journal 'The Australian Standard', which subscribing members receive, and which gives details of new publications, new editions and amendments, and of withdrawn standards.

Suggestions for improvements to Australian standards, addressed to the head office of the Association, are welcomed. Notification of any inaccuracy or ambiguity found in an Australian standard should be made without delay in order that the matter may be investigated and appropriate action taken.

---

*This standard was issued in draft form for comment as DR 81298.*

**AS/NZS 1573:1995**  
**Copper and copper alloys—**  
**Wire for engineering purposes**

9pp D

Specifies requirements for copper and copper alloy wire for general engineering purposes supplied in forms other than straight lengths. Requirements including chemical composition, mechanical properties and dimensional tolerances are specified.

14/7/12: Supersedes AS 1573—1985.  
DR 95037; Publication date 1995-12-05.

**AUSTRALIAN STANDARD**

**COPPER AND COPPER ALLOYS—  
WIRE FOR ENGINEERING  
PURPOSES**

**AS 1573—1985**

First published.....	1974
Second edition.....	1985

**PUBLISHED BY THE STANDARDS ASSOCIATION OF AUSTRALIA  
STANDARDS HOUSE, 80 ARTHUR ST, NORTH SYDNEY, N.S.W.**

ISBN 0 7262 3610 1

## PREFACE

This edition of this standard was prepared under the direction of the Association's Committee on Copper and Copper Alloys by its subcommittee on general engineering wire, to supersede AS 1573—1974. It specifies requirements for copper and copper-alloy wire for general engineering purposes, supplied in forms other than straight lengths.

In revising AS 1573—1974, cognizance was taken of the following draft standard issued by the International Organization for Standardization (ISO):

ISO/DIS 3492 Wrought Copper and Copper Alloys—Drawn Round Wire—Dimensions and Tolerances.

The tolerances were considered to be too wide for Australian practice, and were not accepted for inclusion in the revision.

The former appendix dealing with copper and copper alloy designation has been deleted in the light of the current standard on this topic. Appendix A presents purchasing guidelines, including contractual requirements previously included in the body of AS 1573—1974, and directs attention to matters requiring consideration at the time of enquiry and/or order. The intention is to avoid misinterpretation or other problems and to ensure a clear understanding of product requirements by both purchaser and supplier.

## CONTENTS

	<i>Page</i>
<b>SPECIFICATION</b>	
1 Scope	3
2 Referenced Documents	3
3 Designation	3
4 Definition	3
5 Temper of Material on Delivery	3
6 Chemical Composition	3
7 Freedom from Defects	3
8 Joints	3
9 Manufacturing Tolerances	3
10 Mechanical Properties	3
11 Retests	3
12 Packaging	4
13 Identification	4
14 Interpretation of Specified Limiting Values	4
<b>APPENDICES</b>	
A Purchasing Guidelines	9
B Related Composition Specifications	11
C Examples of Interpretation of Specified Limiting Values in Accordance with the Rounding Method	12

©Copyright — STANDARDS ASSOCIATION OF AUSTRALIA 1985

Users of standards are reminded that copyright subsists in all SAA publications. No part of this publication may be reproduced, stored in a retrieval system in any form or transmitted by any means without prior permission in writing of the Standards Association of Australia.

# STANDARDS ASSOCIATION OF AUSTRALIA

## Australian Standard

for

### COPPER AND COPPER ALLOYS—WIRE FOR ENGINEERING PURPOSES

**1 SCOPE.** This standard specifies requirements for copper and copper alloy wire for general engineering purposes supplied in forms other than straight lengths.

NOTE: Guidelines for purchasers on requirements that must be specified by the purchaser and those that must be agreed at the time of enquiry and/or order are given in Appendix A.

**2 REFERENCED DOCUMENTS.** The following standards are referred to in this standard:

- AS 1391 Methods for Tensile Testing of Metals
- AS 1515 Methods for the Analysis of Copper Alloys
- AS 1696 Methods for the Analysis of Copper
- AS 1817 Method for Vickers Hardness Test Part 1—Testing of Metals
- AS 2338 Preferred Dimensions of Wrought Metal Products
- AS 2614 Copper and Copper Alloys—Sampling for Chemical Analysis and Resistivity
- AS 2706 Numerical Values—Rounding and Interpretation of Limiting Values
- AS 2738 Copper and Copper Alloys—Compositions and Designations Part 2—Wrought Products
- AS K208 Methods for the Analysis of Unalloyed Copper
- AS K209 Methods for the Analysis of Copper Alloys
- BS 1748 Methods for the Analysis of Copper Alloys.

### 3 DESIGNATION.

**3.1 General.** The designation as given in Tables 1 to 3 inclusive, shall include the number of this Australian standard, i.e. AS 1573, together with the alloy designation and temper designation in accordance with Clauses 3.2 and 3.3 respectively.

**3.2 Alloy designation.** The designation of coppers and copper alloys, as given in Tables 1, 2 and 3, shall be in accordance with AS 2738.2.

**3.3 Temper designation.** The temper designation, as given in Tables 2 and 3, shall be designated as O, ¼H, ½H, ¾H, H or SH (see Clause 5), and shall follow the alloy designation.

*Example of complete designation:* AS 1573/260-H.

**4 DEFINITION.** For the purpose of this standard, the following definition applies:

*Wire*—a solid product, other than strip or foil, of round, square, hexagonal or other cross-section including flat wire, supplied in coils or on spools, reels or drums.

### 5 TEMPER OF MATERIAL ON DELIVERY.

The material shall be supplied in one of the following conditions of temper, and shall comply with Table 2 or Table 3, as appropriate:

- O Annealed
- ¼H Quarter hard
- ½H Half hard
- ¾H Three-quarter hard
- H Hard
- SH Spring hard

NOTE: SH temper is also available to other than spring material, and other tempers are available for spring manufacture.

**6 CHEMICAL COMPOSITION.** The chemical composition of the coppers and copper alloys shall conform to the limits specified in Table 1.

NOTE: Related composition specifications are given in Appendix B.

**7 FREEDOM FROM DEFECTS.** The wire shall be clean, smooth, and free from defects detrimental to its subsequent processing and end use.

Notwithstanding that wire has been accepted previously, if subsequent processing reveals that it contains defects found to be detrimental, the wire shall be deemed not to comply with this standard, provided that it has not been improperly treated after delivery.

**8 JOINTS.** There shall be no joints in the wire except those made in the base rod or wire before final drawing.

**9 MANUFACTURING TOLERANCES.** The manufacturing tolerances shall be in accordance with Tables 4 to 6, as appropriate.

### 10 MECHANICAL PROPERTIES.

**10.1 Selection and preparation of test samples** Wire of the same alloy, temper and dimensions shall be grouped in batches.

The selected test samples (see Paragraph A2.1 of Appendix A), shall not, except for the necessary straightening, be mechanically worked or re-heat treated before testing.

**10.2 Tensile test (not applicable to flat wire).** The tensile test shall be carried out in accordance with AS 1391, and the tensile strength and elongation shall comply with Table 2.

**10.3 Hardness test (applicable to flat wire only).** The hardness test shall be carried out in accordance with AS 1817, Part 1, and the values so obtained shall comply with Table 3.

**11 RETESTS.** Should any test piece first selected fail to pass the relevant test specified in Clause 10, one or both of the following procedures shall be adopted:

- (a) The wire represented by the test piece which failed shall either be withdrawn or be set aside for further testing and two further test samples shall be taken from the remainder of the same batch.