

DR 94401

AS 2870.1 Supp1—1989

Amdt. 1 1992.07.13

OK BY
AS 2870
SUPPLEMENT 1—1990

AS 2870.1 Supplement 1—1989

Residential slabs and footings

Part 1: Construction—Commentary

(Supplement to AS 2870.1—1988)



STANDARDS AUSTRALIA



E

This Australian Standard was prepared by Committee BD/25, Residential Slabs and Footings. It was approved on behalf of the Council of Standards Australia on 7 July 1989 and published on 13 November 1989.

The following interests are represented on Committee BD/25:

Association of Consulting Engineers Australia
Australian Construction Services—Department of Administrative Services
Australian Institute of Building Surveyors
Australian Timber Research Institute
Australian Uniform Building Regulations Co-ordinating Council
Cement and Concrete Association of Australia
Clay Brick and Paver Institute
CSIRO, Division of Building, Construction and Engineering
Construction and Housing Association of Australia Inc.
Department of Housing and Construction, South Australia
Housing Industry Association
Institution of Engineers Australia
South Australian Institute of Technology
Steel Reinforcement Institute of Australia

Review of Australian Standards. To keep abreast of progress in industry, Australian Standards are subject to periodic review and are kept up-to-date by the issue of amendments or new editions as necessary. It is important therefore that Standards users ensure that they are in possession of the latest edition, and any amendments thereto.

Full details of all Australian Standards and related publications will be found in the Standards Australia Catalogue of Publications; this information is supplemented each month by the magazine 'The Australian Standard', which subscribing members receive, and which gives details of new publications, new editions and amendments, and of withdrawn Standards.

Suggestions for improvements to Australian Standards, addressed to the head office of Standards Australia, are welcomed. Notification of any inaccuracy or ambiguity found in an Australian Standard should be made without delay in order that the matter may be investigated and appropriate action taken.

AS 2870.1 Supp1—1989

AS 2870.1 Supplement 1—1989

Residential slabs and footings

Part 1: Construction—Commentary

(Supplement to AS 2870.1—1988)

First published as AS 2870.1 Supp1—1989.

PUBLISHED BY STANDARDS AUSTRALIA
(STANDARDS ASSOCIATION OF AUSTRALIA)
STANDARDS HOUSE, 80 ARTHUR ST, NORTH SYDNEY NSW
ISBN 0 7262 5868 7

PREFACE

This Commentary was prepared by Standards Australia's Committee on Residential Slabs and Footings and contains explanations and additional background material that will assist in the interpretation of AS 2870.1, *Residential slabs and footings*, Part 1: *Construction*.

The layout of this Commentary is identical to that of the Standard. The numbering differs only in that its clauses, figures and tables are prefixed by the letter 'C', e.g. Clause C3.2.1 of this Commentary refers to Clause 3.2.1 of the Standard. Where there is no commentary to a clause of the Standard the Clause number does not appear. Therefore the clause numbers in this commentary are not consecutive. References to various papers are listed as the last item of the section or appendix in which they occur.

© Copyright — STANDARDS AUSTRALIA

Users of Standards are reminded that copyright subsists in all Standards Australia publications and software. Except where the Copyright Act allows and except where provided for below no publications or software produced by Standards Australia may be reproduced, stored in a retrieval system in any form or transmitted by any means without prior permission in writing from Standards Australia. Permission may be conditional on an appropriate royalty payment. Requests for permission and information on commercial software royalties should be directed to the Head Office of Standards Australia.

Standards Australia will permit up to 10 percent of the technical content pages of a Standard to be copied for use exclusively in-house by purchasers of the Standard without payment of a royalty or advice to Standards Australia.

Standards Australia will also permit the inclusion of its copyright material in computer software programs for no royalty payment provided such programs are used exclusively in-house by the creators of the programs.

Care should be taken to ensure that material used is from the current edition of the Standard and that it is updated whenever the Standard is amended or revised. The number and date of the Standard should therefore be clearly identified.

The use of material in print form or in computer software programs to be used commercially, with or without payment, or in commercial contracts is subject to the payment of a royalty. This policy may be varied by Standards Australia at any time.

CONTENTS

	<i>Page</i>
INTRODUCTION	4
SECTION C1. SCOPE AND GENERAL	
C1.1 SCOPE	6
C1.2 APPLICATION	6
C1.3 DESIGN REQUIREMENTS	6
C1.5 DEFINITIONS	6
SECTION C2. SITE CLASSIFICATION	
C2.1 GENERAL	7
C2.2 NATURAL CLASSES A AND S SITES	8
C2.3 NATURAL CLASSES M, H AND E SITES	8
C2.4 CLASS P SITES	10
C2.5 EFFECT OF FILL ON NATURAL CLASSIFICATION	11
SECTION C3. DESIGN OF FOOTING SYSTEMS—CLASSES A AND S SITES	
C3.1 FOOTING SYSTEM DESIGNATION	12
C3.2 DESIGN OF FOOTING SYSTEM	12
C3.3 PIER-AND-BEAM, PIER-AND-SLAB OR PILE FOOTING SYSTEMS	13
SECTION C4. DESIGN OF FOOTING SYSTEMS—CLASSES M AND H SITES	
C4.1 FOOTING SYSTEMS DESIGNATION	14
C4.2 DESIGN OF FOOTING SYSTEMS	14
C4.3 PIER-AND-BEAM, PIER-AND-SLAB OR PILE FOOTING SYSTEMS	17
C4.4 CONCENTRATED LOADS ON FOOTING SYSTEMS FOR REACTIVE CLAYS	17
SECTION C5. DESIGN OF FOOTING SYSTEMS—REGIONS INCLUDING CLASS E SITES	
C5.1 GENERAL	18
C5.2 SITE CLASSIFICATION	18
C5.3 STRUCTURAL DESIGN	18
SECTION C6. CONSTRUCTION REQUIREMENTS	
C6.1 SLABS	19
C6.2 STRIP AND PAD FOOTINGS	21
C6.3 BUILDING PRACTICES FOR CLASS M, H OR E SITES	21
APPENDIX CA. DAMAGE CLASSIFICATION	23

STANDARDS AUSTRALIA

Residential slabs and footings
Part 1: Construction—Commentary
(Supplement to AS 2870.1—1988)

INTRODUCTION

PURPOSE.

The Standard provides for simple standard methods for the design of residential footings based on sound structural and geotechnical principles. It applies to a variety of footing systems for most foundation conditions including reactive soils—a very common foundation in Australia. The Standard is in mandatory form for use in building control. As a consequence, some of the advisory information in AS 2870—1986 has been deleted from the revised version.

DESIGN REQUIREMENTS.

In order to provide more background to footing design, a brief discussion follows of the aspects that are taken into account in the Standard.

(a) *Design for swelling and shrinkage movements.* The primary cause of foundation failure in domestic structures is associated with the movement of reactive clay soils. A soil is said to be reactive or expansive when it undergoes appreciable volume change upon changes in moisture content. The reactivity of a soil depends upon the size of clay particles, their mineral composition and the proportion of clay in the soil. The reactivity of clay soils cannot be clearly evaluated by tests. In particular, the usual engineering index properties (i.e. liquid and plastic limits and linear shrinkage) on their own may not be reliable.

The movement that might occur on a site depends not only on the reactivity of the clay but also on the depth and distribution of the clay in the soil profile and on changes in moisture content. Moisture changes usually occur slowly in clays and produce swelling upon wetting and shrinkage upon drying. These moisture changes often result from a combination of causes, and include the following:

- (i) Seasonal and long term climate changes, including dry summers, floods and droughts.
- (ii) Influence of the house, garden and drainage; in particular trees which cause severe drying.
- (iii) Long term effects of the whole urban infrastructure, including paving and drainage.
- (iv) Initial moisture conditions at the site relative to the long term design conditions, including special conditions such as demolition of an existing house, removal of large trees, etc.

The actual pattern of the movement of a reactive clay foundation depends on the moisture and clay variation and will be quite complex. The form could often include asymmetric and warping components. Nonetheless, for the purpose of design, the pattern of differential movement can generally be represented by one of the forms given in Figure C1.

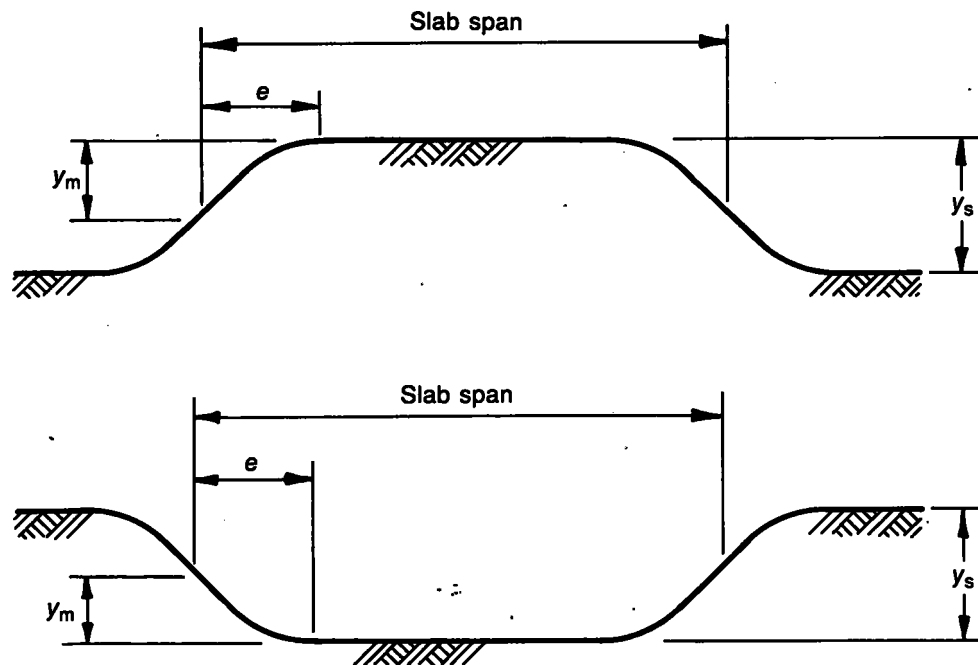


FIGURE C1. TYPICAL GROUND MOVEMENT PATTERNS FOR FOOTINGS AND SLABS ON CLAYS