

AS/NZS 62386.102:2020



Australian/New Zealand Standard™

Digital addressable lighting interface

Part 102: General requirements — Control gear (IEC 62386-102:2014+AMD1:2018 CSV (ED. 2.1) MOD)



AS/NZS 62386.102:2020

This Joint Australian/New Zealand Standard™ was prepared by Joint Technical Committee EL-041, Lamps and Related Equipment. It was approved on behalf of the Council of Standards Australia on 4 November 2020 and by the New Zealand Standards Approval Board on 4 November 2020.

This Standard was published on 20 November 2020.

The following are represented on Committee EL-041:

- Australian Industry Group
- Better Regulation Division
- CHOICE
- Consumer Electronics Suppliers Association
- Consumers' Federation of Australia
- Department of Industry, Science, Energy and Resources
- Electrical Compliance Testing Association of Australia
- Electrical Regulatory Authorities Council
- Energy Efficiency & Conservation Authority of New Zealand
- IES: The Lighting Society
- Joint Accreditation System of Australia and New Zealand
- Joint Accreditation System of Australia and New Zealand — New Zealand
- Lighting Council Australia
- Lighting Council New Zealand
- Master Electricians Australia
- Master Electricians NZ
- WorkSafe New Zealand

This Standard was issued in draft form for comment as DR AS/NZS 62386.102:2020.

Keeping Standards up-to-date

Ensure you have the latest versions of our publications and keep up-to-date about Amendments, Rulings, Withdrawals, and new projects by visiting:

www.standards.org.au

www.standards.govt.nz

ISBN 978 1 76113 060 1

Australian/New Zealand Standard™

Digital addressable lighting interface

**Part 102: General requirements — Control gear
(IEC 62386-102:2014+AMD1:2018 CSV (ED.
2.1) MOD)**

First published as AS/NZS 62386.102:2020.



© ISO 2020 — All rights reserved

© Standards Australia Limited/the Crown in right of New Zealand, administered by the New Zealand Standards Executive 2020

All rights are reserved. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical, including photocopying, without the written permission of the publisher, unless otherwise permitted under the Copyright Act 1968 (Cth) or the Copyright Act 1994 (New Zealand).

Preface

This Standard was prepared by the Joint Standards Australia/Standards New Zealand Committee EL-041, Lamps and Related Equipment.

The objective of this document is to specify control gear in a bus system for control by digital signals of electronic lighting equipment with the addition of DC supplies.

Tests in this document are type tests. Requirements for testing individual control gear during production are not included.

This document is an adoption with national modifications, and has been reproduced from, IEC 62386-102:2014+AMD1:2018 CSV (ED. 2.1), *Digital addressable lighting interface — Part 102: General requirements — Control gear*. The modifications are additional requirements and are set out in [Appendix ZZ](#), which has been added at the end of the source text.

[Appendix ZZ](#) lists the variations to IEC 62386-102:2014+AMD1:2018 CSV (ED. 2.1), for the application of this document in Australia and New Zealand.

As this document has been reproduced from an International Standard, the following applies:

- (a) In the source text “this Part of IEC 62386” should read “this document”.
- (b) A full point substitutes for a comma when referring to a decimal marker.

Australian or Australian/New Zealand Standards that are identical adoptions of international normative references may be used interchangeably. Refer to the online catalogue for information on specific Standards.

The terms “normative” and “informative” are used in Standards to define the application of the appendices or annexes to which they apply. A “normative” appendix or annex is an integral part of a Standard, whereas an “informative” appendix or annex is only for information and guidance.

NOTES

CONTENTS

FOREWORD.....	7
INTRODUCTION.....	9
1 Scope.....	11
2 Normative references	11
3 Terms and definitions	11
4 General.....	14
4.1 General.....	14
4.2 Version number.....	14
5 Electrical specification	15
6 Interface power supply.....	15
7 Transmission protocol structure	15
7.1 General.....	15
7.2 16 bit forward frame encoding	15
7.2.1 General	15
7.2.2 Address byte.....	15
7.2.3 Opcode byte	15
8 Timing.....	16
9 Method of operation.....	16
9.1 General.....	16
9.2 Control gear.....	16
9.2.1 General	16
9.2.2 Control gear phases.....	16
9.3 Dimming curve	17
9.4 Calculating “ <i>targetLevel</i> ”	20
9.5 Fading	20
9.5.1 General	20
9.5.2 Fade time	21
9.5.3 Fade rate.....	23
9.5.4 Extended fade time	23
9.5.5 Using the fade time.....	25
9.5.6 Using the fade rate.....	25
9.5.7 System response to changes during a fade.....	26
9.5.8 System response to changes during standby and startup	26
9.5.9 Stopping a fade.....	26
9.6 Min and max level	26
9.7 Commands.....	27
9.7.1 General	27
9.7.2 Level instructions without fade	28
9.7.3 Level instructions initiating a fade.....	28
9.7.4 Configuration instructions.....	28
9.7.5 Queries.....	28
9.7.6 Special commands.....	28
9.7.7 Application extended commands	28
9.8 Command iterations	28
9.8.1 General	28

9.8.2	Command iteration of “UP” and “DOWN” commands	29
9.8.3	DAPC SEQUENCE (deprecated)	29
9.9	Modes of operation	30
9.9.1	General	30
9.9.2	Operating mode 0x00: standard mode	30
9.9.3	Operating mode 0x01 to 0x7F: reserved	30
9.9.4	Operating mode 0x80 to 0xFF: manufacturer specific modes.....	30
9.10	Memory banks	30
9.10.1	General	30
9.10.2	Memory map	31
9.10.3	Selecting a memory bank location	32
9.10.4	Memory bank reading.....	32
9.10.5	Memory bank writing	32
9.10.6	Memory bank 0	33
9.10.7	Memory bank 1	35
9.10.8	Manufacturer specific memory banks	37
9.10.9	Reserved memory banks	37
9.11	Reset.....	37
9.11.1	Reset operation	37
9.11.2	Reset memory bank operation	37
9.12	System failure	37
9.13	Power on	38
9.14	Assigning short addresses.....	39
9.14.1	General	39
9.14.2	Random address allocation	39
9.14.3	Identification of a device	40
9.14.4	Direct address allocation	41
9.15	Failure state behaviour.....	41
9.16	Status information	41
9.16.1	General	41
9.16.2	Bit 0: Control gear failure	41
9.16.3	Bit 1: lamp failure	42
9.16.4	Bit 2: lamp on	44
9.16.5	Bit 3: limit error	44
9.16.6	Bit 4: fade running.....	44
9.16.7	Bit 5: reset state	44
9.16.8	Bit 6: missing short address	44
9.16.9	Bit 7: power cycle seen	44
9.17	Non-volatile memory	45
9.18	Device types and features	45
9.19	Using scenes	46
10	Declaration of variables	47
11	Definition of commands	49
11.1	General.....	49
11.2	Overview sheets	49
11.3	Level instructions	54
11.3.1	DAPC (<i>level</i>)	54
11.3.2	OFF	54
11.3.3	UP.....	54

11.3.4	DOWN	54
11.3.5	STEP UP	54
11.3.6	STEP DOWN	55
11.3.7	RECALL MAX LEVEL	55
11.3.8	RECALL MIN LEVEL	55
11.3.9	STEP DOWN AND OFF	56
11.3.10	ON AND STEP UP	56
11.3.11	ENABLE DAPC SEQUENCE	56
11.3.12	GO TO LAST ACTIVE LEVEL	57
11.3.14	CONTINUOUS UP	57
11.3.15	CONTINUOUS DOWN	57
11.3.13	GO TO SCENE (<i>sceneNumber</i>)	57
11.4	Configuration instructions	57
11.4.1	General	57
11.4.2	RESET	57
11.4.3	STORE ACTUAL LEVEL IN DTR0	58
11.4.4	SAVE PERSISTENT VARIABLES	58
11.4.5	SET OPERATING MODE (<i>DTR0</i>)	58
11.4.6	RESET MEMORY BANK (<i>DTR0</i>)	58
11.4.7	IDENTIFY DEVICE	59
11.4.8	SET MAX LEVEL (<i>DTR0</i>)	59
11.4.9	SET MIN LEVEL (<i>DTR0</i>)	59
11.4.10	SET SYSTEM FAILURE LEVEL (<i>DTR0</i>)	60
11.4.11	SET POWER ON LEVEL (<i>DTR0</i>)	60
11.4.12	SET FADE TIME (<i>DTR0</i>)	60
11.4.13	SET FADE RATE (<i>DTR0</i>)	60
11.4.14	SET EXTENDED FADE TIME (<i>DTR0</i>)	60
11.4.15	SET SCENE (<i>DTR0, sceneX</i>)	61
11.4.16	REMOVE FROM SCENE (<i>sceneX</i>)	61
11.4.17	ADD TO GROUP (<i>group</i>)	61
11.4.18	REMOVE FROM GROUP (<i>group</i>)	61
11.4.19	SET SHORT ADDRESS (<i>DTR0</i>)	62
11.4.20	ENABLE WRITE MEMORY	62
11.5	Queries	62
11.5.1	General	62
11.5.2	QUERY STATUS	62
11.5.3	QUERY CONTROL GEAR PRESENT	62
11.5.4	QUERY CONTROL GEAR FAILURE	62
11.5.5	QUERY LAMP FAILURE	62
11.5.6	QUERY LAMP POWER ON	62
11.5.7	QUERY LIMIT ERROR	63
11.5.8	QUERY RESET STATE	63
11.5.9	QUERY MISSING SHORT ADDRESS	63
11.5.10	QUERY VERSION NUMBER	63
11.5.11	QUERY CONTENT DTR0	63
11.5.12	QUERY DEVICE TYPE	63
11.5.13	QUERY NEXT DEVICE TYPE	63
11.5.14	QUERY PHYSICAL MINIMUM	64
11.5.15	QUERY POWER FAILURE	64

11.5.16	QUERY CONTENT DTR1	64
11.5.17	QUERY CONTENT DTR2	64
11.5.18	QUERY OPERATING MODE	64
11.5.19	QUERY LIGHT SOURCE TYPE	64
11.5.20	QUERY ACTUAL LEVEL	65
11.5.21	QUERY MAX LEVEL	65
11.5.22	QUERY MIN LEVEL	65
11.5.23	QUERY POWER ON LEVEL	65
11.5.24	QUERY SYSTEM FAILURE LEVEL	65
11.5.25	QUERY FADE TIME/FADE RATE	65
11.5.26	QUERY EXTENDED FADE TIME	65
11.5.27	QUERY MANUFACTURER SPECIFIC MODE	65
11.5.28	QUERY SCENE LEVEL (<i>sceneX</i>)	65
11.5.29	QUERY GROUPS 0-7	66
11.5.30	QUERY GROUPS 8-15	66
11.5.31	QUERY RANDOM ADDRESS (H)	66
11.5.32	QUERY RANDOM ADDRESS (M)	66
11.5.33	QUERY RANDOM ADDRESS (L)	66
11.5.34	READ MEMORY LOCATION (<i>DTR1, DTR0</i>)	66
11.6	Application extended commands	66
11.6.1	General	66
11.6.2	QUERY EXTENDED VERSION NUMBER	67
11.7	Special commands	67
11.7.1	General	67
11.7.2	TERMINATE	67
11.7.3	DTR0 (<i>data</i>)	67
11.7.4	INITIALISE (<i>device</i>)	67
11.7.5	RANDOMISE	68
11.7.6	COMPARE	68
11.7.7	WITHDRAW	68
11.7.8	SEARCHADDRH (<i>data</i>)	68
11.7.9	SEARCHADDRM (<i>data</i>)	69
11.7.10	SEARCHADDRL (<i>data</i>)	69
11.7.11	PROGRAM SHORT ADDRESS (<i>data</i>)	69
11.7.12	VERIFY SHORT ADDRESS (<i>data</i>)	69
11.7.13	QUERY SHORT ADDRESS	69
11.7.14	ENABLE DEVICE TYPE (<i>data</i>)	70
11.7.15	DTR1 (<i>data</i>)	70
11.7.16	DTR2 (<i>data</i>)	70
11.7.17	WRITE MEMORY LOCATION (<i>DTR1, DTR0, data</i>)	70
11.7.18	WRITE MEMORY LOCATION – NO REPLY (<i>DTR1, DTR0, data</i>)	71
11.7.19	PING	71
12	Test procedures	71
	Void	
Annex A (informative)	Examples of algorithms	72
A.1	Random address allocation	72
A.2	One single control gear connected to the control device	72
A.3	Using application extended commands	73
Annex B (normative)	High resolution dimmer	74

Bibliography	76
Figure 1 – IEC 62386 graphical overview	9
Figure 2 – Control gear directly operating a light source	16
Figure 3 – Dimming curve	18
Figure 4 – Level over time, fading up and down	21
Figure 5 – Timing and response when executing command iteration	29
Figure 11 – Correlation between “ <i>lampFailure</i> ”, “ <i>lampOn</i> ”, and “ <i>fadeRunning</i> ” bits	43
Figure B.1 – Level behaviour in cases of off-grid starting points	75
Table 1 – 16-bit command frame encoding	15
Table 2 – Dimming curve tolerance (% , rounded to two decimals)	18
Table 3 – Dimming curve	19
Table 4 – Fade times	22
Table 5 – Fade rates	23
Table 6 – Extended fade time – base value	24
Table 7 – Extended fade time – multiplier	24
Table 8 – Basic memory map of memory banks	31
Table 9 – Memory map of memory bank 0	33
Table 10 – Memory map of memory bank 1	36
Table 11 – Power on timing	39
Table 12 – Control gear status	41
Table 13 – Scenes	46
Table 14 – Declaration of variables	47
Table 15 – Standard commands	49
Table 16 – Special commands	53
Table 17 – Light source type encoding	64
Table 18 – Device addressing with “INITIALISE”	67

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DIGITAL ADDRESSABLE LIGHTING INTERFACE –**Part 102: General requirements –
Control gear****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

DISCLAIMER

This Consolidated version is not an official IEC Standard and has been prepared for user convenience. Only the current versions of the standard and its amendment(s) are to be considered the official documents.

This Consolidated version of IEC 62386-102 bears the edition number 2.1. It consists of the second edition (2014-11) [documents 34C/1099/FDIS and 34C/1112/RVD], its amendment 1 (2018-09) [documents 34/523/FDIS and 34/534/RVD]. The technical content is identical to the base edition and its amendment.

This Final version does not show where the technical content is modified by amendment 1. A separate Redline version with all changes highlighted is available in this publication.

International Standard IEC 62386-102 has been prepared by subcommittee 34C: Auxiliaries for lamps, of IEC technical committee 34: Lamps and related equipment.

This second edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) elimination of all non-control gear relevant definitions,
- b) improvement of the requirements for control gear by clarifying the description,
- c) improvement of the test command iterations to increase the compatibility,
- d) addition of new commands, and
- e) the deletion of the requirements for:
 - 1) timing;
 - 2) control devices.

The requirements for timing are now in Part 101 and the requirements for control devices are in Part 103.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

This Part 102 is intended to be used in conjunction with Part 101, which contains general requirements for the relevant product type (system), and with the appropriate Part 2xx (particular requirements for control gear) containing clauses to supplement or modify the corresponding clauses in Parts 101 and 102 in order to provide the relevant requirements for each type of product.

A list of all parts of the IEC 62386 series, under the general title: *Digital addressable lighting interface*, can be found on the IEC website.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

IEC 62386 contains several parts, referred to as series. The 1xx series includes the basic specifications. Part 101 contains general requirements for system components, Part 102 extends this information with general requirements for control gear and Part 103 extends it further with general requirements for control devices.

The 2xx parts extend the general requirements for control gear with lamp specific extensions (mainly for backward compatibility with Edition 1 of IEC 62386) and with control gear specific features.

The 3xx parts extend the general requirements for control devices with input device specific extensions describing the instance types as well as some common features that can be combined with multiple instance types.

This second edition of IEC 62386-102 is intended to be used in conjunction with IEC 62386-101:2014 and IEC 62386-101:2014/AMD1:2018 and with the various parts that make up the IEC 62386-2xx series for control gear, together with IEC 62386-103:2014 and IEC 62386-103:2014/AMD1:2018 and the various parts that make up the IEC 62386-3xx series of particular requirements for control devices. The division into separately published parts provides for ease of future amendments and revisions. Additional requirements will be added as and when a need for them is recognised.

The setup of the standard is graphically represented in Figure 1 below.

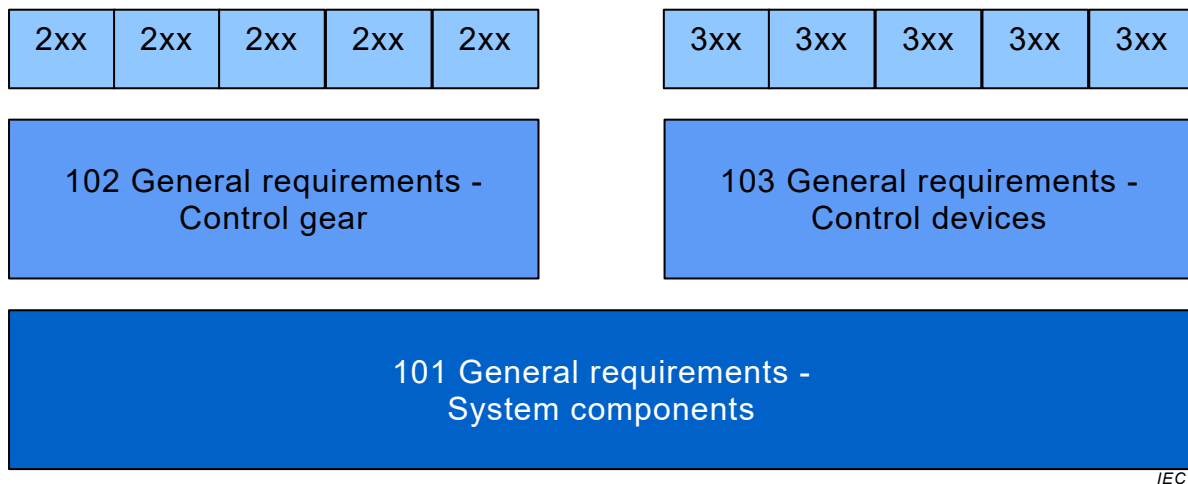


Figure 1 – IEC 62386 graphical overview

When this part of IEC 62386 refers to any of the clauses of the other two parts of the IEC 62386-1xx series, the extent to which such a clause is applicable and the order in which the tests are to be performed are specified. The other parts also include additional requirements, as necessary.

All numbers used in this International Standard are decimal numbers unless otherwise noted. Hexadecimal numbers are given in the format 0xVV, where VV is the value. Binary numbers are given in the format XXXXXXXXb or in the format XXXX XXXX, where X is 0 or 1 and "x" in binary numbers means "don't care".

The following typographic expressions are used:

Variables: *variableName* or *variableName[3:0]*, giving only bits 3 to 0 of *variableName*

Range of values: [lowest, highest]

Command: "COMMAND NAME"

DIGITAL ADDRESSABLE LIGHTING INTERFACE –

Part 102: General requirements – Control gear

1 Scope

This Part of IEC 62386 is applicable to control gear in a bus system for control by digital signals of electronic lighting equipment which is in line with the requirements of IEC 61347 (all parts), with the addition of DC supplies.

NOTE Tests in this standard are type tests. Requirements for testing individual control gear during production are not included.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62386-101:2014, *Digital addressable lighting interface – Part 101: General requirements – System components*
IEC 62386-101:2014/AMD1:2018

IEC 62386-103:2014, *Digital addressable lighting interface – Part 103: General requirements – Control devices*
IEC 62386-103:2014/AMD1:2018

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62386-101 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

actual level

value representing the current light output

3.2

arc power

power supplied to the light sources (lamps)

3.3

broadcast

type of address used to address all control gear in the system at once