


ANSI C82.77-2002

American National
Standard for Harmonic
Emission Limits -
Related Power Quality
Requirements for
Lighting Equipment

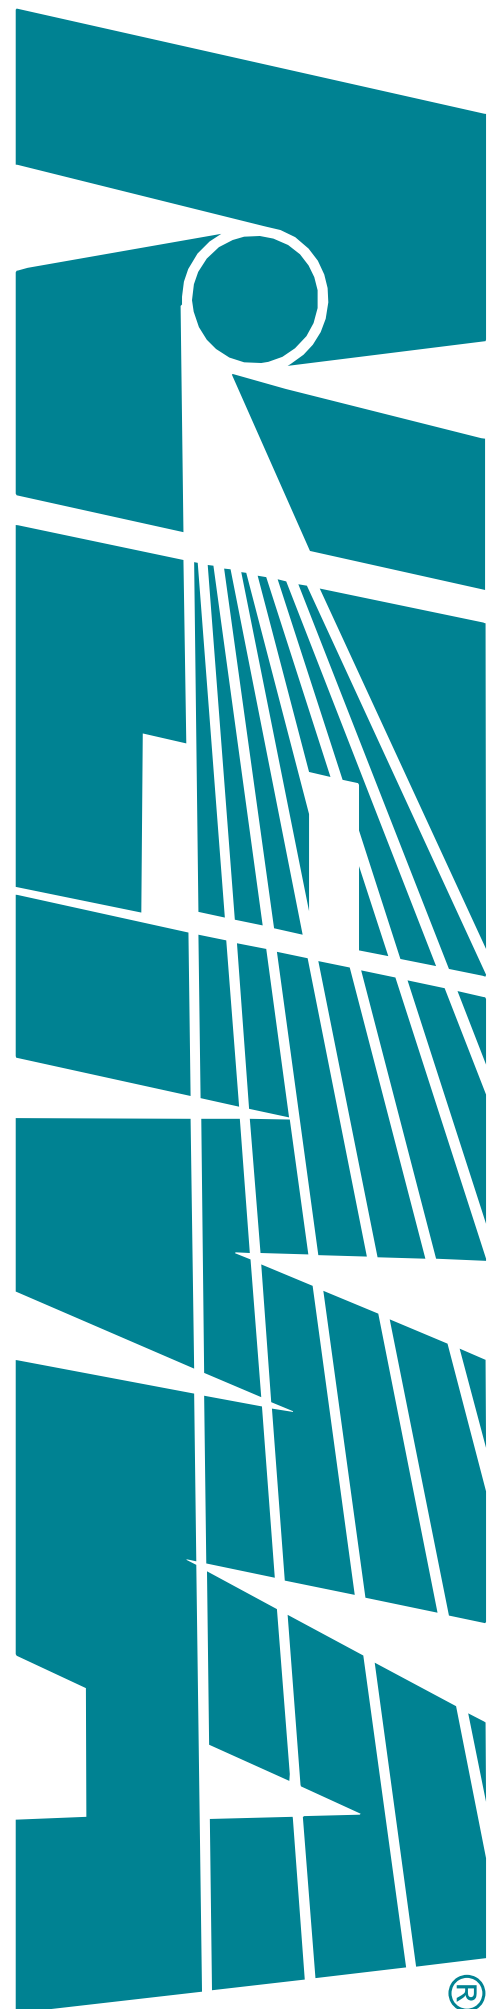

American National Standard

Approved January, 17 2002

Secretariat: ANSLG National Electrical Manufacturers Association

--

Harmonic Emission Limits— Related Power Quality Requirements for Lighting Equipment

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. It is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether he has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standards. Users are cautioned to obtain the latest editions.

The American National Standards Institute does not develop standards and will in no circumstances give an interpretation of any American National Standard. Moreover, no person shall have the right or authority to issue an interpretation of an American National Standard in the name of the American National Standards Institute.

CAUTION NOTICE: This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken periodically to reaffirm, revise, or withdraw this standard. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute.

American National Standard

Approval of an American National Standard requires verification by ANSI that the requirements for due process, consensus, and other criteria for approval have been met by the standards developer. An American National Standard implies a consensus of those substantially concerned with its scope and provisions. Consensus is established when, in the judgment of the ANSI Board of Standards Review, substantial agreement has been reached by directly and materially affected interests. Substantial agreement means much more than a simple majority, but not necessarily unanimity. Consensus requires that all views and objections be considered, and that a concerted effort be made toward their resolution. The existence of an American National Standard does not in any respect preclude anyone, whether s/he has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standards. It is intended as a guide to aid the manufacturer, the consumer, and the general public.

The American National Standards Institute does not develop standards and will in no circumstances give an interpretation of any American National Standard. Moreover, no person shall have the right or authority to issue an interpretation of an American National Standard in the name of the American National Standards Institute. Requests for interpretations should be addressed to the Committee Secretariat referred to on the title page.

CAUTION NOTICE: This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken periodically to reaffirm, revise, or withdraw this standard. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute.

Printed and distributed by:

Information Handling Services/Global Engineering Documents
15 Inverness Way East, Englewood, CO 80112-5776
Under Contract with National Electrical Manufacturers Association

Copyright © 2002 by American National Standard Lighting Group
In Affiliation with National Electrical Manufacturers Association
All rights reserved.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without prior written permission of the publisher.

Printed in the United States of America

Foreword (This Foreword is not part of ANSI C82.77-2002.)

Suggestions for improvement of this standard should be submitted to the Secretariat C82, American National Lighting Group of the National Electrical Manufacturers Association, 1300 North 17th Street, Suite 1847, Rosslyn, VA 22209. This standard was processed and approved by Accredited Standards Committee on Electric Lamps, C82, and its Work Groups C82-1 and C82-2. Committee approval of the standard does not necessarily imply that all committee members voted for that approval.

Information concerning the approval of this standard is based on the documents listed in the table below:

Amendment / Change	CDV	RV
First Edition	82 (1/2)/m672	82 (1/2)/m673v2

At the time it approved this standard, the ASC 82 Committee had the following members:

Howard Wolfman, Chair ASC 82
Edward Yandek, Technical Coordinator
Randolph N. Roy, Secretariat and Coordinating Editor
Ken Denton, Consulting Editor

<i>Organization Represented:</i>	<i>Name of Representative:</i>
Advance Transformer Company.....	Robert Erhardt
Cooper Lighting (NEMA Delegate).....	Donald Miletich
Edison Electric Institute (Delegate).....	Al Maguire
GE Lighting	Edward Yandek
	Edward Hammer
	Selmar Dorsey
GE Lighting Systems	Michael Owens
	Rebecca Lancaster
Holophane Lighting Company.....	Michael Tanner
Hubbell Lighting, Inc. (NEMA Delegate).....	William E. Buckson
InterTek Testing Services	David Edwards
	David Ellis
Lithonia/Hi-Tek Lighting (NEMA Delegate)	Fred Carpenter
MagneTek Lighting Products Group	Bill Brosius
	Michael Stein
OSRAM SYLVANIA	Howard Wolfman
	Joe Parisella
Philips Lighting Company	Al Rousseau
Underwriters Laboratories, Inc.....	John Marshall
	David Belt

At the time it approved this standard, the C82-1 Work Group had the following members:

Ken Denton, Chair, C82-1

Randolph N. Roy, Secretariat

<i>Organization Represented:</i>	<i>Name of Representative:</i>
Advance Transformer Company	Robert Erhardt
	Beth Jug
GE Lighting	Edward M. Yandek
	Edward E. Hammer
Howard Industries Inc.	Wayne Causey
	Eric Brown
Industrias Sola Basic	Emilio Catan G.
	Gerardo Arias
InterTek Testing Services	David Edwards
Lutron Electronics Co. Inc.....	Robert Newman Jr.
MagneTek Lighting Products Group	Thomas Poehlman
	Robert Burke
Manufacturera De Reactores	Garcia Azcue
OSRAM SYLVANIA INC.	Howard Wolfman
	Joe Parisella
Philips Lighting Company	Thomas O. Leyh
	Al C. Rousseau
Power Lighting Products Inc.....	Marcelino Garcia
Thomas & Betts—American Electric	Greg Steinman
Underwriters Laboratories, Inc.	John Marshall
ZAE Research.....	Ken Denton

At the time it approved this standard, the C82-2 Work Group had the following members:

Michael Minarczyk, Chair, C82-2

Randolph N. Roy, Secretariat

<i>Organization Represented:</i>	<i>Name of Representative:</i>
Advance Transformer Company.....	Al Reinken Robert Erhardt Chacko Oommen
Aromat Corporation	Dail Swanson
Cooper Lighting	Kenneth Simms J. C. Johnson
Daybrite	Bill Busch
Edison Electric Institute (Delegate).....	Al Maguire
GE Lighting	Edward M. Yandek Selmar Dorsey
GE Lighting Systems	Rebecca Lancaster Michael Owens
Genlyte Thomas	Kurt Christensen
Holophane Lighting	Michael Tanner
Howard Industries Inc.....	Wayne Causey Jason Cook
Hubbell Lighting Inc.	Ike Flory IV
Industrias Sola Basic	Emilio Catan G. Antonio Salas
INNOVA Inc.	Ahmad Shishegar
InterTek Testing Services	David Edwards
Lithonia/Hi-Tek Lighting	Fred Carpenter
MagneTek Lighting Products Group	Bob Boydston Bill Brosius
Manufacturera De Reactores	Garcia Azcue
OSRAM SYLVANIA INC.....	Howard Wolfman Suping Lou
Philips Lighting Company	Sarah Carleton Bill Simpson
Thomas & Betts—American Electric.....	Greg Steinman
Underwriters Laboratories, Inc.....	John Marshall
Venture Lighting International	Thomas Harding Dennis Bradley
Venture Power Systems	Allan Brown Glenn Garbowicz

This Page
Intentionally
Left Blank

TABLE OF CONTENTS

Foreword	iii
1 Scope	1
2 Normative references	2
3 Definitions	3
3.1 Power factor	3
3.2 Residential lighting equipment.....	3
3.3 Commercial lighting equipment	3
3.4 Industrial lighting equipment.....	3
3.5 Hard wired	3
3.6 Portable	3
3.7 Total harmonic distortion (THD).....	3
4 Lighting equipment emission limits - general considerations	4
5 Specific lighting equipment emission limits by product type and application.....	4
5.1 Residential lighting equipment.....	4
5.2 Indoor hard wired luminaires and indoor portable luminaires	5
5.3 Commercial lighting equipment for general lighting	5
5.4 Industrial lighting equipment for general lighting applications	6
5.5 Roadway, sports arena, and convention center lighting equipment	7
5.6 Stage & studio lighting equipment	7
6 Testing and measurements- general	8
7 Practical measurement methodology for type testing of products	8
Annex I (normative) Additional requirements for some commercial lighting equipment.....	A-3
Annex II (informative) references	A-5
Table 1 Residential Integrally ballasted medium screw base compact light sources.....	4
Table 2 Residential indoor hard-wired and portable luminaires for all lighting applications.....	5
Table 3 Commercial Indoor hard wired ballasts or luminaires	5
Table 4 Commercial task lighting, down lighting and modular office furniture	6

This Page
Intentionally
Left Blank

AMERICAN NATIONAL STANDARD

--

Harmonic Emission Limits— Related Power Quality Requirements for Lighting Equipment

1 Scope

This standard specifies harmonic limits and methods of measurement for lighting equipment. This standard covers all types of lighting equipment that is used for general illumination (typically found in residential, commercial, and industrial applications) and which is connected to any of the following commonly distributed 60 Hz alternating current (AC) power line systems:

- 120V, Single Phase
- 220/230V, Single Phase
- 208/240V, Single Phase
- 277V, Single Phase
- 480V, 3 Phase

Note: These line voltages are nominal and include commonly encountered nameplate variations of the above. As an example, products rated at either 117, 120, or 125 Volts AC would be covered as being inclusive of nominal 120V systems.

This standard summarizes the de-facto limits that have been employed successfully by the industry thus far and establishes them as appropriate for lighting equipment used in the United States (used in conjunction with US local wiring, building, distribution and lighting practices).

This standard also covers certain special use lighting areas: roadway, sports arena, convention center, stage, and studio.

Limits are only applicable to the specific categories of lighting equipment defined in the standard. All other types of lighting equipment, although covered, do not have limits at this time and do not need to be measured or tested, but shall be deemed to be in compliance with this standard without measurement or testing by the manufacturer or any third party.

Harmonic emission limits, where they are defined by this standard, shall include both harmonic and interharmonic emissions over the low frequency range 0 – 9 kHz. At this time, limits for interharmonics are not specified.

This standard covers lighting equipment regardless of wattage (operating input power level) or operating input current. However, emission limits will only be specified over a range of power or current deemed to be warranted at this time.

The manufacturer's ratings or declared values of operating voltage, operation power, and input line current shall be used where such values are needed to determine appropriate product classification or compliance to this standard. Historical lighting practices and considerations found in other standards ensure that ratings and declared values are representative of production values.

This standard supersedes the requirements for power factor and THD of ANSI C82.11.

Depending upon the specific product, harmonic limits in this standard may be expressed in terms of THD rather than individual limits for specific harmonics or interharmonics. Since there is a technical relationship between harmonic content, THD, and power factor, some products will include PF requirements where the addition of these criteria is helpful in setting a baseline for power quality impact of lighting equipment. Emphasis has been on establishing limits that are simple to assess and that are in keeping with the practices of this industry.

Lighting equipment covered under the scope of this standard which contains only passive electrical components or passive ballast circuitry is exempt from limits and need not be measured or tested, i.e., core and coil ballasts. High reactance autotransformer dimming ballasts for HID lighting are also exempted and need not be measured or tested.

Note: As an example, an electronic starter (which contains an electronic component) is sometimes used in conjunction with passive ballast circuitry. The overall device or equipment would still be classified as a passive ballast circuit.

Lighting equipment that is contained in another product system (i.e., video projector, appliance, copy machine, PC, etc) is not covered by this standard.

Requirements in this standard only apply to normal operating modes for covered equipment.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this American National Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this American National Standard are encouraged to investigate the possibility of applying the most recent edition of the standards indicated below.

IEEE 519 -1992, *Recommended Practices and Requirements for Harmonic Control in Electric Power Systems*.

ANSI C82.11-1993 (R1998), *High Frequency Fluorescent Lamp Ballasts*